




## REZ-1T42-M2-LD

|                 |                    |
|-----------------|--------------------|
| Brand Name      | MARK 10 POWERLINE  |
| Ballast Type    | Electronic Dimming |
| Starting Method | Programmed Start   |
| Lamp Connection | Series             |
| Input Voltage   | 120                |
| Input Frequency | 60 HZ              |
| Status          | Active             |

### Electrical Specifications

| Lamp Type     | Num. of Lamps | Rated Lamp Watts | Min. Start Temp (°F/C) | Input Current (Amps) | Input Power (Watts) (min/max) | Ballast Factor (min/max) | MAX THD % | Power Factor | Lamp Current Crest Factor | B.E.F. |
|---------------|---------------|------------------|------------------------|----------------------|-------------------------------|--------------------------|-----------|--------------|---------------------------|--------|
| * CFQ26W/G24Q | 1             | 26               | 50/10                  | 0.26                 | 08/31                         | 0.05/1.00                | 10        | 0.98         | 1.6                       | 3.23   |
| CFTR26W/GX24Q | 1             | 26               | 50/10                  | 0.26                 | 08/31                         | 0.05/1.00                | 10        | 0.98         | 1.6                       | 3.23   |
| CFTR32W/GX24Q | 1             | 32               | 50/10                  | 0.32                 | 09/38                         | 0.05/1.00                | 10        | 0.98         | 1.6                       | 2.63   |
| CFTR42W/GX24Q | 1             | 42               | 50/10                  | 0.41                 | 10/49                         | 0.05/1.00                | 10        | 0.99         | 1.6                       | 2.04   |

### Wiring Diagram

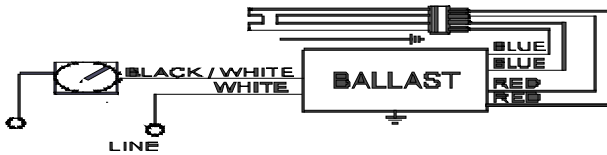


Diag. 134

The wiring diagram that appears above is for the lamp type denoted by the asterisk (\*)

### Standard Lead Length (inches)

### Enclosure

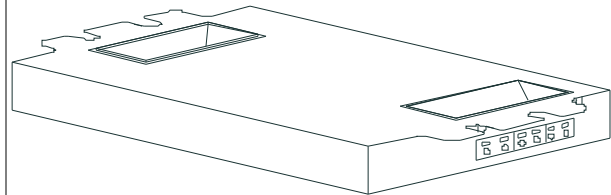

### Enclosure Dimensions

| OverAll (L) | Width (W) | Height (H) | Mounting (M) |
|-------------|-----------|------------|--------------|
| 4.98 "      | 3.00 "    | 1.29 "     | 4.60 "       |
| 4 49/50     | 3         | 1 29/100   | 4 3/5        |
| 12.6 cm     | 7.6 cm    | 3.3 cm     | 11.7 cm      |

Revised 08/17/2006



Data is based upon tests performed by Advance Transformer in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

### ADVANCE

O'HARE INTERNATIONAL CENTER · 10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018  
 Customer Support/Technical Service: Phone: 800-372-3331 · Fax: 630-307-3071  
 Corporate Offices: Phone: 800-322-2086