



**EYE LIGHTING INTERNATIONAL  
OF NORTH AMERICA, INC.**  
A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Home About Us Products How to buy Trade Shows Trade Associations Industry Links Lighting FAQs Lighting Library

**MR16 - 120V Medium Base**

**EYE Dichro-Cool ®**

**Features**


- Long Life
- 120 Volt operation

**Applications**


- Home
- Retail Stores
- Lounges
- Museums
- Restaurants
- Offices
- Displays

120V Dichroic Reflector Medium Base with Cover Glass											
Watts	Volts	Base	Product	Product	Product	Case	Ctr. Beam	Average	Color	Filament	Beam Spread
(W)	(V)		Code	Description	Comparison Guide	Qty.	Intensity (cd)	Life	Temp (K)		Data
55	120	E26	77081	JX1240	55MR16CG/MED/107120V	12	4500	2000	300 0	CC-8	Dia.1
	120	E26	77130	JX1241	55MR16CG/MED/177120V	12	2400	2000	300 0	CC-8	Dia.2
	120	E26	77179	JX1242	55MR16CG/MED/247120V	12	1500	2000	300 0	CC-8	Dia.3

**Lamp Drawings unit: mm**



**JX Medium Base**

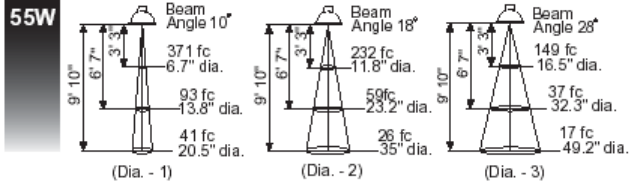

- The intensity level at the center of the beam is shown in footcandles.
- Beam diameter in inches is shown at a distance of 3 ft. 3 in., 6 ft. 7 in., and 9 ft. 10 in.
- The intensity level at the outer edge of the beam diameter is 50% of the center beam footcandle reading.

--top--