



**EYE LIGHTING INTERNATIONAL  
OF NORTH AMERICA, INC.**  
A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Home About Us Products How to buy Trade Shows Trade Associations Industry Links Lighting FAQs Lighting Library

## MR16 - Super Soft

### EYE Dichro-Cool®


**Features**

- Frosted Cover Glass
- Soft diffused light

**Applications**

- Displays
- Retail Stores
- Restaurants
- Dining Rooms/Kitchens
- Anywhere soft light is required

MR16 Super Soft 12V Dichroic Reflector 2-Pin Base - GU5.3 Frosted with Cover Glass											
Watts	Volts	Base	Product	Product	Product	Case	Ctr. Beam	Average	Color	Filament	Beam Spread
(W)	(V)		Code	Description	Comparison Guide	Qty.	Intensity (cd)	Life	Temp (K)		Data
20	12	GU5.3	72086	JR1253F	20MR16FCG/43/(BAB)	12	290	4000	2950	C-6	Dia.1
35	12	GU5.3	72678	JR1353F	35MR16FCG/47/(FMW)	12	600	5000	3000	C-6	Dia.2
50	12	GU5.3	73559	JR1554F	50MR16FCG/52/(EXN)	12	950	5000	3050	C-6	Dia.3
	12	GU5.3	73998	JR1566F	50MR16FCG/63/(FNV)	12	540	5000	3050	C-6	Dia.4

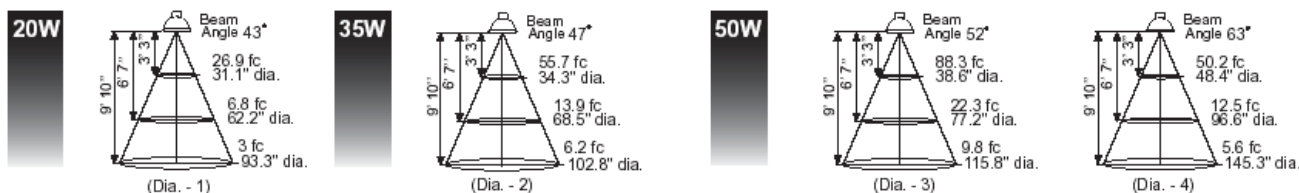

- The intensity level at the center of the beam is shown in footcandles.
- Beam diameter in inches is shown at a distance of 3 ft. 3 in., 6 ft. 7in., and 9 ft. 10 in.
- The intensity level at the outer edge of the beam diameter is 50% of the center beam footcandle reading.

--top--