



TECHNICAL BULLETIN

PULSE START MERCURY VAPOR LAMP

Moon Pulse
HR100PS/R30

ANSI Code: Rated for ANSI M90 Metal Halide Ballast


Product Code: 70961

Features:


- Long life
- Nickel-plated base
- Rugged construction

- Applications, Landscape


PERFORMANCE DATA		
Initial lumens at rated watts after 100 hours operation	3100	lm
Mean lumens at 11 hours/start	2500	lm
Rated average life	10000	h
Warm up time (90% lumens)	4	min
Correlated color temperature	5800	K
CIE chromaticity	0.323, 0.385	X, Y
Color rendering index	17	
Operating position	Universal	
Time to hot re-start (max)	10	min

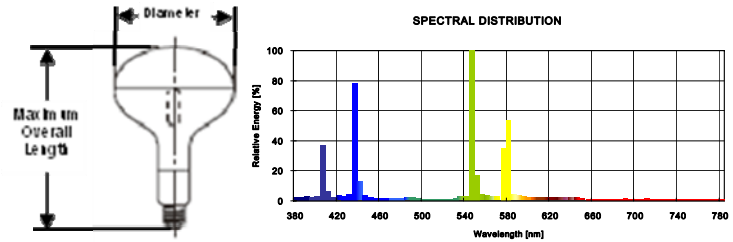

ELECTRICAL CHARACTERISTICS		
Nominal lamp wattage	100	W
Nominal lamp voltage	100	V _{rms}
Nominal lamp current	1.1	A _{rms}
Current crest factor	1.8	
Ballast requirements	Use with ballast rated for ANSI M90 lamps	
Open circuit voltage	235	V _{peak}
-30°C (-22°F)	332	V _{rms}
Min. starting current	1.1	A _{rms}
Max. starting current	1.50	A _{rms}

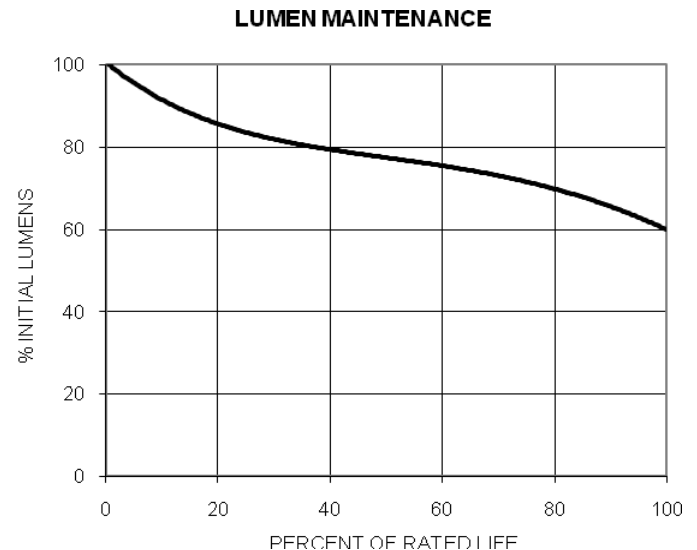

PHYSICAL DESCRIPTION		
Effective Arc Length	N/A	mm (in)
Maximum overall length	138 (5.4)	mm (in)
Light center length	N/A	mm (in)
Bulb diameter	95 (3.75)	mm (in)
Base to bulb eccentricity (max)	3°	max
Maximum base temperature	190 (374)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb designation	R30 (R95)	
Bulb material	Borosilicate glass (Hard glass)	
Arc tube material	Quartz	
Bulb finish	Frosted	
Base designation	E26	

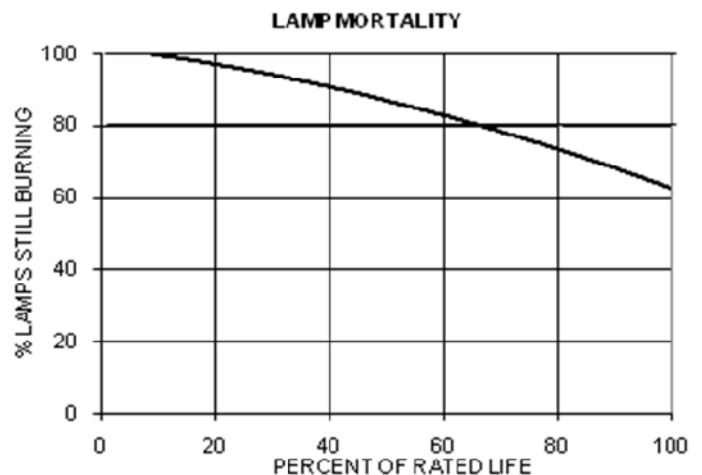

ISO 9001:2008 Certified ISO 14001:2004 Certified OHSAS 18001:2007 Certified ISO 17025:2005 Accredited



EYE LIGHTING INTERNATIONAL
OF NORTH AMERICA, INC.

A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Address: 9150 Hendricks Rd., Mentor, OH 44060
Phone: 888-665-2677 Fax: 800-811-7395 E-Mail: sales@eyelighting.com
Phone: (440) 350-7000 Fax: (440) 350-7001 Web: www.eyelighting.com

EQS-N-52-78-70961

October 22, 2008



⚠ WARNING

This lamp can cause serious skin burn and eye inflammation from short-wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.

RISK OF ELECTRIC SHOCK

- Turn power off before inspection, installation or removal
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock

RISK OF FIRE

- Keep combustible materials away from lamp during operation

UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE, OR PROPERTY DAMAGE

- Do not exceed rated ballast voltage
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life
- Do not turn on lamp until fully installed
- Use only with a fixture and ballast rated for this product
- Turn lamp off at least once a week for 15 minutes
- Electrically insulate any metal to glass support in fixture

⚠ CAUTION

RISK OF BURN

- Allow lamp to cool before handling.

LAMP MAY SHATTER AND CAUSE INJURY

- Do not use excessive force when installing lamp
- Dispose of lamp in a closed container

LAMP OPERATING INSTRUCTIONS

This is a discharge lamp and requires some time to restart and come up to full brightness after a power interruption. If power supply dips or is interrupted, lamps may extinguish and not restart. Turn off power supply for 10-15 minutes and allow lamp to fully cool. Lamp will restart when power is restored.

R	Conforms to: USA: 21CFR1040.30 Canada: ANSI 136.1-2000
----------	---

- LAMP CONTAINS MERCURY. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-888-665-2677.

