




Input Volts		120	208	240	277
Circuit Type	CWA				
Power Factor	0.96				
Regulation					
Line Volts	± 10 %				
Lamp Watts	- 10 % + 10 %				
Line Current (Amps)					
Operating		4.0	2.3	2.0	1.75
Open Circuit		2.15	1.35	1.10	0.95
Starting		3.4	2.0	1.7	1.5
Recommended Fuse		10	8	5	5
UL Temperature Ratings					
Insulation Class	H (180°C)				
Coil Temperature Code		B	E	D	E
Benchtop Coil Rise Primary		76	86	86	86
Benchtop Coil Rise Secondary		-	94	-	93
Input Watts		458	460	460	460
NOM Open Circuit Volts	290				
Current Crest Factor	1.62				
Input Voltage at Lamp Dropout		60	104	120	139
Min Ambient Starting Temp.	-20°F -30°C				
High Potential Test (Volts)					
1 Minute	1650				
1 Second	2000				
Open Circuit Voltage Test (Volts)					
Open Circuit Voltage	260 - 320				
Input Current	min	1.60	1.00	0.80	0.70
	max	2.75	1.70	1.40	1.20
Short Circuit Current Test (Amps)					
Secondary Current	3.5 - 4.3				
Input Current	min	2.45	1.40	1.20	1.05
	max	4.15	2.35	2.05	1.80
Core and Coil Specifications					
Dimension A"	2.00				
Dimension B"	3.93				
Weight (lbs.)	12				
Lead Lengths (in)	12				
Capacitor Specifications					
Microfarads	24				
Volts (min.)	400				
	Oval OIL Filled	DRY Film			
Case Size (in.)	1.75	1.8			
Height (in.)	3.87	5.2			
Temp Rating °C	90	100			
Starter Specifications					
Model Number	Not Used				
	BTL				
Temp Rating °C					

Wiring Diagram Number 1091-912000-001

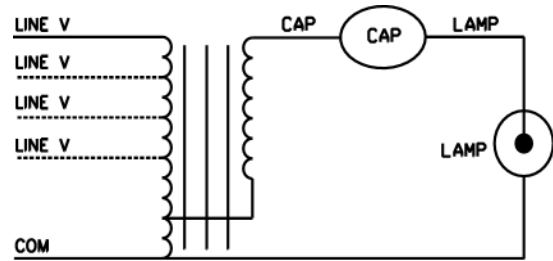

- Outside Dimensions Drawing 1080-046410-015
- ISO-View of Core Coil 1091-912002-002
- 1091-912002-009
- Oil Capacitor Can Drawing 1011-007500-003
- Dry Capacitor Can Drawing 1012-007500-001
- Starter Case Drawing



Specifications subject to change without notice.