




Input Volts	480	
Circuit Type	CWA	
Power Factor	0.95	
Regulation		
Line Volts	± 10 %	
Lamp Watts	-10%	+8%
Line Current (Amps)		
Operating	3.54	
Open Circuit	1.44	
Starting	3.12	
Recommended Fuse	10	
UL Temperature Ratings		
Insulation Class	H (180°C)	
Coil Temperature Code	E	
Benchtop Coil Rise Primary	89	
Benchtop Coil Rise Secondary	92	
Input Watts	1603	
NOM Open Circuit Volts	462	
Current Crest Factor	1.65	
Input Voltage at Lamp Dropout	240	
Min Ambient Starting Temp.	-20°F -30°C	
High Potential Test (Volts)		
1 Minute	2000	
1 Second	2400	
Open Circuit Voltage Test (Volts)		
Open Circuit Voltage	415 - 508	
Input Current	min	1.05
	max	1.80
Short Circuit Current Test (Amps)		
Secondary Current	7.3 - 9.1	
Input Current	min	2.35
	max	3.95
Core and Coil Specifications		
Dimension A"	4.00	
Dimension B"	6.13	
Weight (lbs.)	29.6	
Lead Lengths (in)	12	
Capacitor Specifications		
Microfarads	32	
Volts (min.)	525	
	Oval OIL Filled	DRY Film
Case Size (in.)	1.75	
Height (in.)	5.3	
Temp Rating °C	90	
Starter Specifications		
Model Number	None	
	BTL	
Temp Rating °C		

Wiring Diagram Number 1091-912000-001

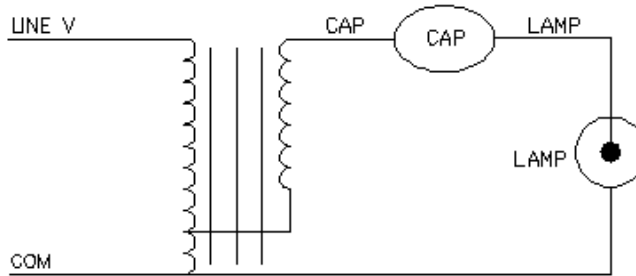

Outside Dimensions Drawing 1080-046466-000

ISO-View of Core Coil 1091-912002-010

Oil Capacitor Can Drawing 1011-007500-003

Dry Capacitor Can Drawing

Starter Case Drawing



Specifications subject to change without notice.