


# HELIX™

## ELECTRONIC BULBS

## New! Product Information Bulletin

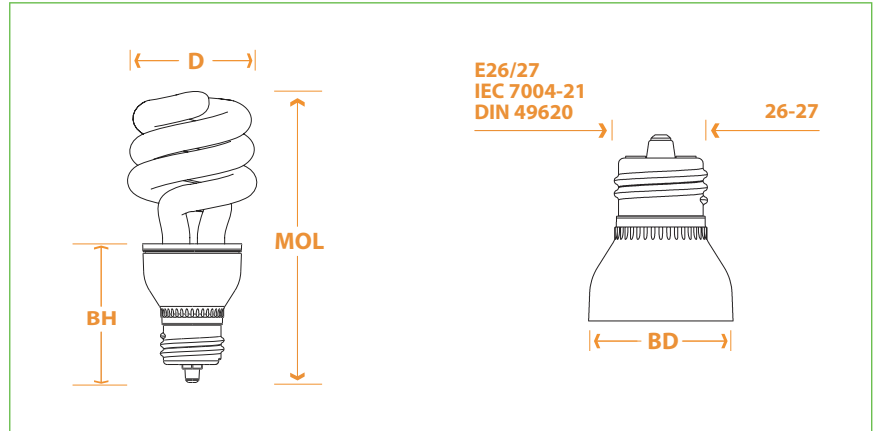

### Technical Data

HELIX™ Electronic, NPF, Medium Base (E26/27), 120VAC- 50/60Hz, 8,000 Hours Average Life												Incandescent Equivalent			
Item Number	Watts	Input Line Current	Power Factor	THD	M.O.L. (Inches)	D (Inch)	BD (Inch)	BH (Inch)	Color Temp. (°K)	CRI	Lumens	Lm/W	Watts	Lumens	Lm/W
24509	9	0.150A	>0.50	<150%	3.95	1.875	1.57	2.0	2750	>82	600	66	40	450	11.25
24513-35K*	13	0.180A	>0.50	<150%	4.125	1.875	1.57	2.0	3500	>82	800	66	60	800	13.30
24514*	14	0.230A	>0.50	<150%	4.125	1.875	1.57	2.0	2750	>82	925	66	60	900	15.00
24518*	18	0.300A	>0.50	<150%	4.250	2.125	1.57	2.0	2750	>82	1200	66	75	1150	15.30
24524*	24	0.400A	>0.50	<150%	4.750	2.125	1.73	2.5	2750	>82	1600	66	100	1600	16.00
24528	28	0.455A	>0.50	<150%	5.250	2.375	1.73	2.5	2750	>82	1850	66	x	x	x
24530*	30	0.495A	>0.50	<150%	5.250	2.375	1.73	2.5	2750	>82	2075	68	125	2050	16.40
24542	42	0.700A	>0.50	<150%	6.750	2.880	2.28	2.9	2750	>82	2800	67	200	2400	12.0

APPLICATION INFORMATION TO BE USED WITH TABLE LAMPS • PENDANT LAMPS • DESK LAMPS • OUTDOOR FIXTURES • TRACK LIGHTS • RECESSED CANS • WARDROBE CLOSETS • DRIVEWAYS • WALKWAYS • YARDS & GARDENS • OPEN & TOTALLY ENCLOSED FIXTURES • USE WITH OCCUPANCY SENSORS MADE BY NEPTUN • AND MORE

### Features and Benefits

- \* The most compact CFLs on the market with FULL LIGHT OUTPUT
- \* Saves up to 80% energy with comparable light output
- \* Color Temperature of 2700°K - 2750°K : Matching Incandescent bulbs
- \* High Luminous Efficiency: Up to 70 Lm/W
- \* Very long life: Up to 10 times longer than ordinary bulbs
- \* New! Patented Amalgam Technology
- \* Rapid Start with End of Life Protection and Electronic Preheat
- \* Superior Lumen Maintenance

NEPTUN LIGHT, Inc.  
 service@neptunlight.com  
 Tel. 1-847-735-8330  
 Toll Free: 1-888-735-8330



© Copyright 2006 NEPTUN LIGHT, Inc.

