

[Return to search](#)

[Print Page](#)



Product Number: 29535
Order Abbreviation: CF23RC/BR30/2700K/1 120V
General Description: DURA-ONE 23W compact fluorescent lamp with BR30 reflector, integral 120V ballast, medium screw base, 2700K color temperature, 82CRI, packaged 6/carton


Product Information

Abbrev. With Packaging Info.	CF23RCBR302700K1 120V 6/CS 1/SKU
Average Rated Life (hr)	15000
Base	Medium
Bulb	BR30
Color Rendering Index (CRI)	82
Color Temperature/CCT (K)	2700
Diameter (in)	3.81
Diameter (mm)	96.7
Family Brand Name	Dulux® EL
Industry Standards	CSA, FCC 47CFR PART 18 CONSUMER, UL
Initial Lumens at 25C	1100
Mean Lumens at 25C	880
Maximum Overall Length - MOL (in)	5.56
Maximum Overall Length - MOL (mm)	141.2
Nominal Voltage (V)	120.00
Nominal Wattage (W)	23.00

Additional Product Information

Product Documents, Graphs, and Images

Packaging Information

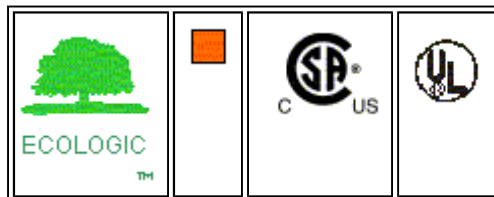

Footnotes

- Approximate initial lumens after 100 hours operation.

- Minimum starting temperature for DULUX EL lamps is 0° F, unless otherwise specified in product literature. .
- DULUX Els meet CSA, FCC and UL requirements.
- The life ratings of fluorescent lamps are based on 3 hr. burning cycles under specified conditions and with ballast meeting ANSI specifications. If burning cycle is increased, there will be a corresponding increase in the average hours life.
- Caution: Although DURA-ONE lamps can be used with occupancy sensors that have a fluorescent volt-amp rating, DURA-ONE lamps cannot be used on any other dimming circuits, emergency exit fixtures or lights, electronic timers, photocells, lighted switches or any other switches that do not meet UL20 Sec. 7.6.15. In outdoor applications, use only in enclosed fixtures to avoid exposure to weather. Use only on 120V, 60 Hz circuits. Never disassemble or modify lamp. Install or remove unit from fixture by grasping plastic base. Best performance achieved when operated at 77°F (25°C). Operating temperature range of DURA-ONE lamps is -20°F/-29°C to 122°F/50°C.
- Rule of Thumb for Compact Fluorescent Lamps: Divide wattage of incandescent lamp by 4 to determine approximate wattage of compact fluorescent lamp that will provide similar light output.

[Print Page](#)