


PAR38 SERIES

Only for Use in Approved Halogen Fixtures

Watts	Bulb	Item code	Description	Voltage (V)	Dimension		Approx Lumens (lm)	Beam		Avg. Life (Hours)	Case Qty.
					MOL (in)	Dia (in)		Angle	Spread		
PAR38 Series - Medium Screw Base											
45	PAR38	H04577812202	45PAR38/120/SP	120	5.32	4.76	525	12°	Spot	2500	15
45	PAR38	H04577836202	45PAR38/120/FL	120	5.32	4.76	525	36°	Flood	2500	15
*45	PAR38	H04577850202	45PAR38/120/WFL	120	5.32	4.76	525	50°	W. Flood	2500	15
45	PAR38	H04577812302	45PAR38/130/SP	130	5.32	4.76	525	12°	Spot	5000	15
45	PAR38	H04577836302	45PAR38/130/FL	130	5.32	4.76	525	36°	Flood	5000	15
*45	PAR38	H04577850302	45PAR38/130/WFL	130	5.32	4.76	525	50°	W. Flood	5000	15
60	PAR38	H06077812202	60PAR38/120/SP	120	5.32	4.76	525	12°	Spot	2500	15
60	PAR38	H06077836202	60PAR38/120/FL	120	5.32	4.76	525	36°	Flood	2500	15
*60	PAR38	H06077850202	60PAR38/120/WFL	120	5.32	4.76	525	50°	W. Flood	2500	15
60	PAR38	H06077812302	60PAR38/130/SP	130	5.32	4.76	525	12°	Spot	5000	15
60	PAR38	H06077836302	60PAR38/130/FL	130	5.32	4.76	525	36°	Flood	5000	15
*60	PAR38	H06077850302	60PAR38/130/WFL	130	5.32	4.76	525	50°	W. Flood	5000	15
75	PAR38	H07577812202	75PAR38/120/SP	120	5.32	4.76	1040	12°	Spot	2500	15
75	PAR38	H07577836202	75PAR38/120/FL	120	5.32	4.76	1040	36°	Flood	2500	15
75	PAR38	H07577850202	75PAR38/120/WFL	120	5.32	4.76	1040	50°	W. Flood	2500	15
75	PAR38	H07577812302	75PAR38/130/SP	130	5.32	4.76	1040	12°	Spot	5000	15
75	PAR38	H07577836302	75PAR38/130/FL	130	5.32	4.76	1040	36°	Flood	5000	15
75	PAR38	H07577850302	75PAR38/130/WFL	130	5.32	4.76	1040	50°	W. Flood	5000	15
*90	PAR38	H09077808202	90PAR38/120/NSP	120	5.32	4.76	1280	8°	N. Spot	2500	15
90	PAR38	H09077812202	90PAR38/120/SP	120	5.32	4.76	1280	12°	Spot	2500	15
90	PAR38	H09077836202	90PAR38/120/FL	120	5.32	4.76	1280	36°	Flood	2500	15
90	PAR38	H09077850202	90PAR38/120/WFL	120	5.32	4.76	1280	50°	W. Flood	2500	15
*90	PAR38	H09077808302	90PAR38/130/NSP	130	5.32	4.76	1280	8°	N. Spot	5000	15
90	PAR38	H09077812302	90PAR38/130/SP	130	5.32	4.76	1280	12°	Spot	5000	15
90	PAR38	H09077836302	90PAR38/130/FL	130	5.32	4.76	1280	36°	Flood	5000	15
90	PAR38	H09077850302	90PAR38/130/WFL	130	5.32	4.76	1280	50°	W. Flood	5000	15
100	PAR38	H10077836202	100PAR38/120/FL	120	5.32	4.76	2070	36°	Flood	2500	15
100	PAR38	H10077836302	100PAR38/130/FL	130	5.32	4.76	2070	36°	Flood	5000	15

* Items only available for special orders

All the 130V PAR lamp will have average life extend to 5000 hours by apply to 120V lighting fixture. All measurements are shown in inches unless noted

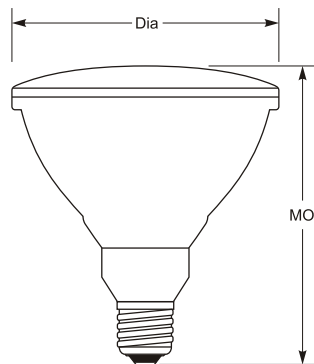

PAR-38
E26 Base

TUNGSTEN HALOGEN LAMPS