



# LOS1000W/120



JOB NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

## DESCRIPTION

Fits decorator wall plates with only 1/2" protrusion. 120 or 277 volts. Gangable. Full 180° view covers 1000 sq. ft. Works with electronic ballasts. Can be wired in parallel. LED indicator, wallplate included. Can also be used as a ceiling sensor.

## SPECIFICATIONS

### UL Listing

Indoor applications Smart Box & Tuff Dome  
 Wet locations

### Compatibility

Compatible with most electronic ballasts.  
 Not compatible with instant start ballasts.  
 Can be wired in parallel

### Maximum Reliability

Superb small movement sensitivity within 18 feet. LOS1000 has "ZAPS" - Zero Arc Point Switching to protect relay contacts lengthen ballast and sensor life.

### Maximum Energy Savings

Light only when you need it. No ON switch so lights are never left on by mistake.

### Coverage Area

1000sf

### Incandescent & Fluorescent Watts

#### Switched

1000 watts @ 120 volts

### Ratings

8 amps 1/6 Horsepower

### Power Consumption

Negligible

### Time Delay

30 seconds to 15 minutes

### Manual Switch

Off - Auto

### Ambient Light Sensing

n/a

### Adjustments

Time

### Detection

180° view covers 1000 sq. feet

### Wiring

Hot & ground

### Patents

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.


### Color

White

### Weight

0.3

## DETECTION PATTERN

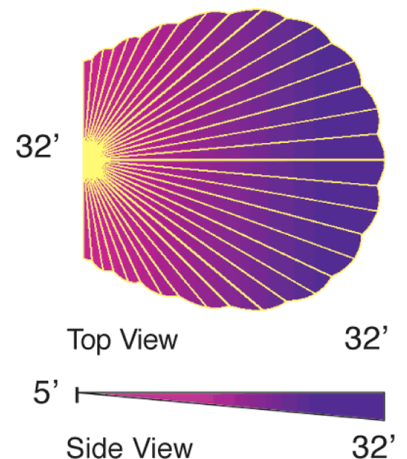

Note: Specifications may change without notice