


## H-1B13-TP-W

Brand Name	COMPACT-HPF
Ballast Type	Magnetic
Starting Method	Pre-Heat
Lamp Connection	Series
Input Voltage	120
Input Frequency	60 HZ
Status	Active

### Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Starting Current (Amps)	Open Circuit (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor
* CFQ13W/GX23	1	13	32/00	0.14	0.36	0.22	16	0.91	25	0.95
CFT13W/GX23	1	13	32/00	0.13	0.36	0.22	16	0.89	25	1.01

### Wiring Diagram

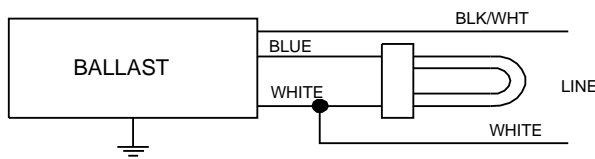


Diag. 47

The wiring diagram that appears above is for the lamp type denoted by the asterisk (\*)

### Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black			Yellow/Blue		
White	15		Blue/White		
Blue	15		Brown		
Red			Orange		
Yellow			Orange/Black		
Gray			Black/White	15	
Violet			Red/White		

### Enclosure

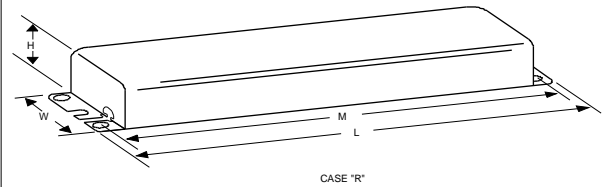

### Enclosure Dimensions

OverAll (L)	Width (std)/(TP)	Height (H)	Mounting (M)
4.25 "	2.00 "	1.4375 "	3.5625 "
4 1/4	2	1 7/16	3 9/16
10.8 cm	5.1 cm / 0 cm	3.7 cm	9 cm

Revised 09/21/1999



Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

### PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886