



BALLAST SPECIFICATION

70W M98
Pulse Start Metal Halide
V90D5832
60 Hz HX-HPF

Input Volts	120	208	240	277
Line Current (Amps)				
Operating	0.80	0.45	0.40	0.35
Open Circuit	1.70	0.95	0.85	0.70
Starting	0.70	0.40	0.35	0.30
Recommended Fuse (Amps)	4	3	2	2
Regulation				
Line Volts	±5%	±5%	±5%	±5%
Lamp Watts	±9%	±9%	±9%	±9%
Temperature Ratings				
Insulation Class	180 (H)	180 (H)	180 (H)	180 (H)
Coil Temperature Code	A	A	A	A
Benchtop Coil Rise	49.8	51.2	50.6	52.3
Power Factor (Min)	90%	90%	90%	90%
Input Watts	90 W	90 W	90 W	90 W
Efficiency	78%	78%	78%	78%
NOM. Open Circuit Voltage	255	255	255	255
Input Voltage At Lamp Dropout	85	150	170	195
Min Ambient Starting Temp	-20°F/-30°C*	-20°F/-30°C*	-20°F/-30°C*	-20°F/-30°C*
60 HZ TEST PROCEDURES				
High Potential Test (Volts)				
1 Minute	2,000 V	2,000 V	2,000 V	2,000 V
1 Second	2,500 V	2,500 V	2,500 V	2,500 V
Open Circuit Voltage Test (V)	230 - 280	230 - 280	230 - 280	230 - 280
Short Circuit Current Test (A)				
Secondary Current	Min 1.00 Max 1.25	Min 1.00 Max 1.25	Min 1.00 Max 1.25	Min 1.00 Max 1.25
Input Current	Min 0.55 Max 0.85	Min 0.30 Max 0.50	Min 0.25 Max 0.45	Min 0.20 Max 0.35
CORE and COIL Specifications				
Dimension (A)	1.45 in	1.45 in	1.45 in	1.45 in
Dimension (B)	2.85 in	2.85 in	2.85 in	2.85 in
Weight	4.9 lb's	4.9 lb's	4.9 lb's	4.9 lb's
Lead Lengths	12"	12"	12"	12"
Capacitor Requirement				
Microfarads	8.0 uf	8.0 uf	8.0 uf	8.0 uf
Volts (Min)	280 V	280 V	280 V	280 V

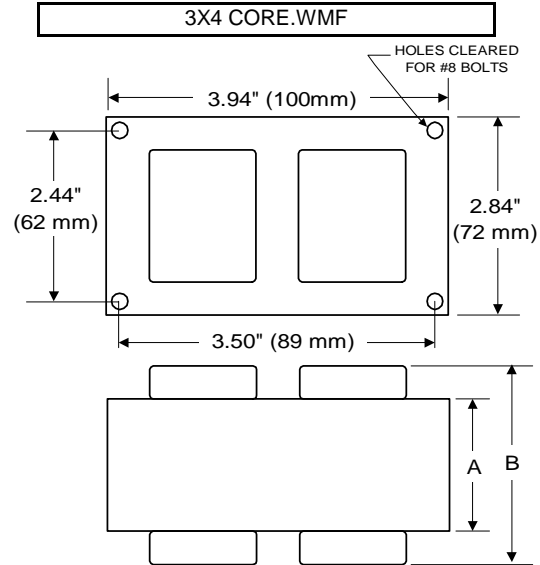

Capacitor:	ACG310	Ignitor:	BVS-032
Microfarads:	8.0 uf	Case Temp (Max):	105 °C
Volts (Max):	280 V	BTL Distance (Max):	2 ft
Case Temp (Max):	100 °C		
Height (Max):	2.76 in		
Dia (Max):	1.21 in		

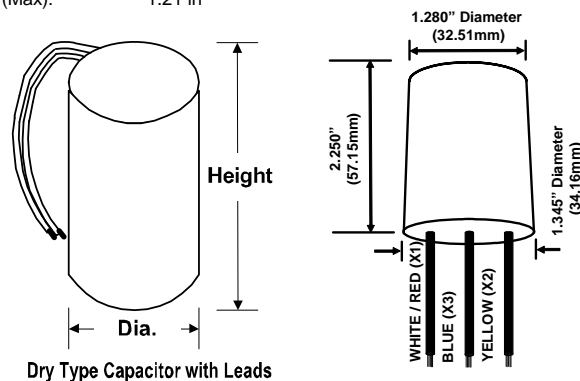


Ordering Information Add Suffix for options

C - With Capacitor
 K - Prewired, with Capacitor and Bracket Kit
 B - With Welded Bracket, no cap
 CB - With Capacitor and Welded Bracket

* -40°F/-40°C Min Ambient Starting Temp with Venture Lamp
 Coil material: primary Cu and secondary Cu

RoHS compliant on all manufactured products after August 1, 2007

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

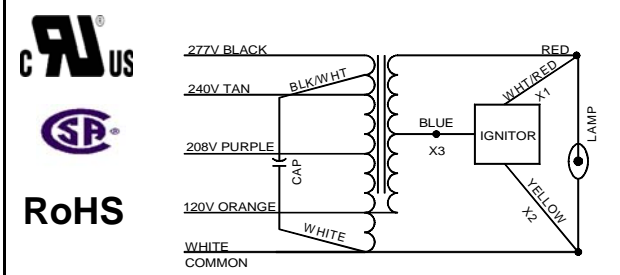

11/24/2008 Production