

Model Number:

Type:

Job:


Approvals:

STANDARD FEATURES

- Constructed of 20 gauge galvanized steel
- Red or green high intensity LEDs
- Constant uniform illumination
- Minimum of 129 LEDs spelling the word "EXIT",
7 LEDs for each arrow
- 1/8" protective polycarbonate shield
- White or black enclosure colors
- Optional enclosure colors available
- Chevron style universal arrow
- Reusable arrow covers
- 120/277V dual primary, 60Hz input
- Voltage surge protection
- 25 year warranty
- 5 year prorated warranty on battery

BATTERY BACK-UP

- Automatic diagnostic tester available
- Trickle charge circuitry for extended battery life
- Overcharge protection provided by zener diode
- Test button located on bottom for easy testing
- LED AC/DC indicators located on exit face protected
by polycarbonate shield
- Flasher/buzzer options meet ADA regulations
- Low voltage disconnect eliminates deep discharge
- Brown-out protection
- ETL recognized maintenance-free lead acid battery
- ETL listed 90 minute emergency run time,
24 hour recharge time
- EL option available

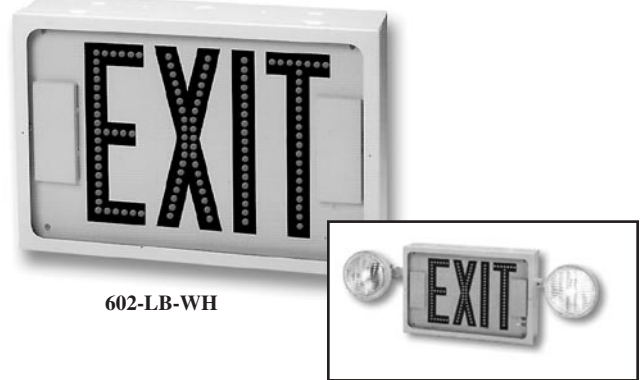


The 600 Series is the brightest most visible sign in the industry in both normal and smoke-filled environments. Constructed of durable 20 gauge steel, this direct view exit provides bright illumination with individual LEDs spelling the word EXIT.

DIMENSIONS

Height: 8 1/2" • Width: 12 3/8" • Depth: 2 3/4" - DF: 3 3/4"

MOUNTING CANOPY DIMENSIONS

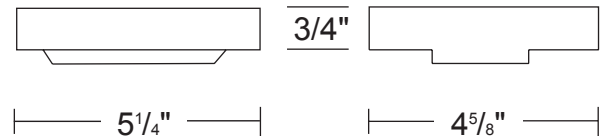

WARRANTY

Any component that fails due to manufacturer's defect is guaranteed for 25 years with a separate 5 year pro-rated warranty on the battery. The warranty does not cover physical damage, abuse or acts of God.

CONFORMANCE TO CODES & STANDARDS

ETL listed. Meets UL 924, NFPA 101 (Life Safety Code) NEC, OSHA and Energy Star illumination standards.



SPECIFICATIONS ARE SUBJECT
TO CHANGE WITHOUT NOTICE

ENERGY EFFICIENT

Starting at only 4 watts, the Exitronix 600 series will save up to 95% of energy costs over conventional bulb signs.

CONSTRUCTION

Enclosure, faceplate, and mounting canopy are 20 gauge galvanized steel with baked-on, powder coat finish. Faceplate has 3/4" black letters with red or green LEDs. 1/8" polycarbonate shield protects LEDs from impact. *Optional faceplate colors are available.

MAINTENANCE-FREE

Installs in minutes with easy-to-read instructions and detailed diagrams. No special hardware or tools necessary. Internally housed components and battery eliminate the use of a canopy when back mounting single face exits. Mounting canopy included.

ORDERING INFORMATION:

G602	WB	WH	DL	E1	EL2A
SERIES	POWER SOURCE	ENCLOSURE COLOR	OPTIONS	OPTIONAL HARDWARE	EL OPTIONS
602 = Red Single Face 603 = Red Double Face G602 = Green Single Face G603 = Green Double Face	LB = Less Battery WB = With Battery NC = Ni-Cad	WH = White BL = Black CC = Custom Color (please specify)	AT= Automatic Diagnostic Tester DL= LED Down Light FL= Flasher BZ= Audible Alarm FB= Flasher & Audible Alarm A1= Fire Alarm Interface w /Flasher A2= Fire Alarm Interface w / Flasher & Audible Alarm DR= Damp Location Rating 6V= 6 Volt DC Remote Emergency Power 12V= 12 Volt DC Remote Emergency Power 2CI= Two AC Circuit Inputs FM= Flush Mount Kit C*= Custom Color Faceplates (See Chart) MR1= 1" Remote Steel Unit MR2= Remote Twin Unit TF = 10 hour run time with Flasher / 5 hours continuous	TRH= Tamper Resistant Hardware TRT6= Tamper Resistant Tool ER1/Kit= 1' Pendant Kit ER2/Kit= 2' Pendant Kit E12= 12" Pendant Extension E24= 24" Pendant Extension	EL2A = Par 36 White Thermoplastic EL2B = Par 36 Black Thermoplastic EL2C = Par 18 White Thermoplastic EL2D = Par 18 Black Thermoplastic EL2E = Par 36 Brushed Aluminum EL2F = Par 36 White Aluminum EL2G = Par 36 Black Aluminum EL0= 18 Watts of Remote Capacity (No Lamps)

CUSTOM COLOR FACEPLATES

Designator	Description
C1	Brushed Chrome Face w/Green Letters
C2	Black Face w/Chrome Letters
C3	Black Face w/Red Letters
C4	Black Face w/Green Letters
C5	Red Face w/White Letters
C6	White Face w/Red Letters
C7	Green Face w/White Letters
C8	Black Face w/White Letters
C9	Brushed Chrome Face w/Black Letters
C10	White Face w/Green Letters
C11	Brushed Brass Face w/Black Letters

INSTALLATION

All units have been designed for easy installation, allowing for ceiling, end and back mounting, or to a junction box with the optional mounting canopy kit. Recessed mounting is also available with the optional mounting kit.

AUTOMATIC DIAGNOSTIC TESTER

This multifunctional option automatically analyzes the operating condition of the sign every seventh day and provides a visual warning if failure has occurred.

EMERGENCY LIGHTS

Emergency lights are single or double face compatible with field selective top or side mounting. Choice of 1 or 2 lights with each utilizing a 6 volt, 5.4 watt high intensity incandescent lamp. Flashing LED display in emergency mode is standard with emergency lights.

YOUR LOCAL REPRESENTATIVE IS:

EXITRONIX™

A DIVISION OF THE

BARRON LIGHTING GROUP

1911 W. Parkside Lane • Phoenix, AZ 85027

(800) 533-3948 • Fax: (623) 580-8948

www.exitronix.com • www.barronlgt.com