

Model Number:

Type:

Job:

Approvals:

STANDARD FEATURES

- Self-powered, always illuminated. Sign provides constant, uninterrupted illumination and requires no external power source
- Quick, easy universal mounting, no wiring needed
- Maintenance-free unit, contains no circuitry, lamps or batteries to replace
- Energy efficient, consumes zero electricity during effective life of 10, 15, or 20 years
- Available with legend colors red, green or black
- Optional security lens available
- Constant, uniform illumination
- Full illuminated 6" letters with 3/4" stroke
- Extreme temperature rated, unit is rated to operate in temperatures from -65°F to 176°F
- Explosion-proof, contains no electrical components or spark producing matter, ideal for hazardous location applications
- Suitable for wet and damp locations
- Vibration-proof
- Custom legends or pictures available
- Meets UL 924 and NFPA Life Safety Code requirements

“IF” OPTION FEATURES *(all of the above, plus...)*

- Attractive, heavy duty, tapered, cast aluminum frame, ideal for any institution or high abuse areas
- Solid 3/8" thick vandal-resistant polycarbonate lens
- No sharp edges or corners
- Available in both single and double face configuration
- Approved for low-level or above door use



PXP Plastic Emergency Signs

Exitronix Self Luminous Signs are the practical solution for Exit and Safety Signs where electricity is unavailable. These signs are totally self-contained, durable and attractive. They are completely free of outside energy sources and provide 10 to 20 years of continuous, maintenance-free illumination.



“IF” Institutional Frame Option

This rugged, institutional Exit Sign provides dependable illumination in the most demanding applications. The 3/8" thick polycarbonate facing and rugged cast aluminum angled frame deter vandalism and abuse.

SPECIFICATIONS ARE SUBJECT
TO CHANGE WITHOUT NOTICE



CONSTRUCTION

Frame:

PXP: Constructed of flame retardant ABS Plastic

“IF” Option: Constructed of .09” thick anodized aluminum

Cover:

PXP: Constructed of molded, clear polycarbonate

“SC” Option: Constructed of 3/8” thick polycarbonate

Legend:

PXP: Die cut polycarbonate, open letters permanent adhesive back with matte surface

ARROWS

Field selectable chevron style arrows are provided with all PX Series products.

ILLUMINATION

Illumination is achieved with a safe light source that consists of sealed glass tubes, internally coated with phosphor and filled with tritium gas. This process provides a completely self-contained, highly durable and attractive means of illumination without the affects of power outages or brown-outs. Minimum initial illumination at time of manufacture is 0.15 foot lamberts.

INSTALLATION

PXP: Snap-together design allows for quick, easy installation. Universal mounting bracket supplied.



“IF”:
Single Face - four #10 size mounting holes are provided for either standard or tamper-proof hardware
Double Face - provides mounting from the top or side of unit, arrows are field selectable

RETURN/DISPOSAL

Exitronix will accept returns for proper disposal. It is unlawful to abandon or dispose of self-luminous signs except by transfer to persons specifically licensed by the Nuclear Regulatory Agency or by an Agreement State.

ORDERING INFORMATION:

PXP	1G	20	BA	IF
SERIES	LEGEND	PRODUCT LIFE	HOUSING COLOR	OPTIONS
PXP = Plastic Housing	1B = Single Face Black 2B = Double Face Black 1G = Single Face Green 2G = Double Face Green 1R = Single Face Red 2R = Double Face Red 1W = Single Face White 2W = Double Face White	10 = 10 Years 15 = 15 Years 20 = 20 Years	WH = White BL = Black BA = Brushed Aluminum GR = Grey	IF = Institutional Frame WG = Wireguard

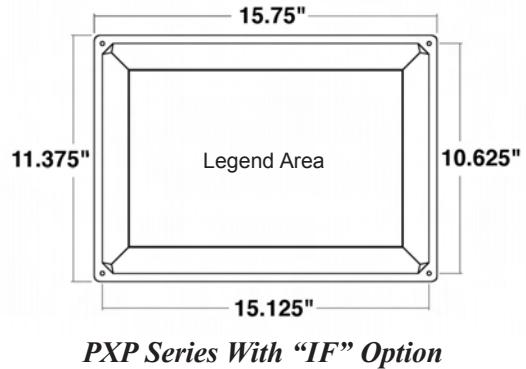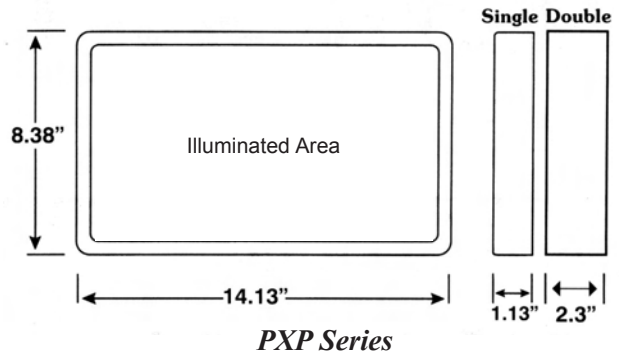

CONFORMANCE TO CODES & STANDARDS

UL and ETL listed, per UL standard 924 and NFPA Life Safety Code 101 (5-10.3) and British Standard 5499. Meets requirements of BOCA and ICBO.

WARRANTY

Our Self Luminous Products are warranted against any defects in material or workmanship for the rated life of the product. We will replace any product free of charge that does not meet our stated specifications.

EXITRONIX™

A DIVISION OF THE
BARRON LIGHTING GROUP
 1911 W. Parkside Lane • Phoenix, AZ 85027
 (800) 533-3948 • Fax: (623) 580-8948
 www.exitronix.com • www.barronltg.com