


CFL-R40™ & CFL-R30™ ELECTRONIC FLOODLIGHT

New! Product Information Bulletin

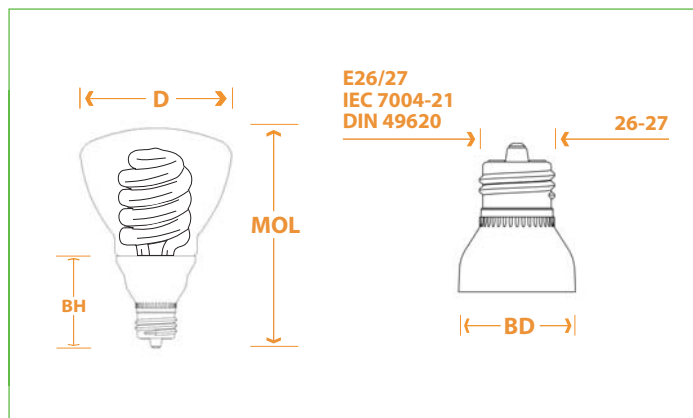

Technical Data

CFL-R40™ & CFL-R30™ Electronic, NPF, Medium Base (E26/27), 120VAC- 50/60Hz, 10,000 Hours Average Life													Incandescent Equivalent		
Item Number	Watts	Line Current	Power Factor	THD	M.O.L. (Inch)	D (Inch)	BD (Inch)	BH (Inch)	Color Temp. (°K)	CRI	Lumens	Lm/W	Watts	Lumens	Lm/W
34023	23	0.360A	>0.50	<150%	4.625	4.625	1.57	2.35	2850	>82	1150	50	x	x	x
34019*	19	0.310A	>0.50	<150%	4.625	4.625	1.57	2.35	2850	>82	950	50	x	x	x
34019-SPINK	19	0.310A	>0.50	<150%	4.625	4.625	1.57	2.35	2700	>82	950	50	x	x	x
34019-RY	19	0.310A	>0.50	<150%	4.625	4.625	1.57	2.35	2600	>82	950	50	x	x	x
34016	16	0.260A	>0.50	<150%	4.625	4.625	1.57	2.35	2850	>82	750	50	65	730	11.2
33016*	16	0.260A	>0.50	<150%	3.625	3.625	1.57	2.35	2850	>82	750	47	65	725	11.1
33016-SPINK	16	0.260A	>0.50	<150%	3.625	3.625	1.57	2.35	2700	>82	750	47	65	725	11.1
33016-RY	16	0.260A	>0.50	<150%	3.625	3.625	1.57	2.35	2600	>82	750	47	65	725	11.1
33014	14	0.230A	>0.50	<150%	3.625	3.625	1.57	2.35	2850	>82	650	47	45	485	10.7

APPLICATION INFORMATION: TO BE USED WITH TRACK LIGHTS • RECESSED CANS • WARDROBE CLOSETS • DRIVEWAYS • WALKWAYS • YARDS & GARDENS OPEN & TOTALLY ENCLOSED FIXTURES • USE WITH OCCUPANCY SENSORS MADE BY NEPTUN • AND MORE

NOTE: SPINK = SOFT PINK • RY = RESTAURANT YELLOW

Features and Benefits

- * Saves up to 70% energy with comparable light output
- * Energy Star Certified for 10,000 hours (*)
- * Color Temperature of 2850°K: Matching incandescent R lamps
- * High Luminous Efficiency: Up to 50 Lm/W
- * Wide range of operation temperatures: 0°F - 120°F
- * New! Patented Amalgam Technology: Any working position with stable light output
- * Superior Lumen Maintenance of 85% after 4,000 Hours of use
- * Indoor or Outdoor

NEPTUN LIGHT, Inc.
service@neptunlight.com
Tel. 1-847-735-8330
Toll Free: 1-888-735-8330



© Copyright 2006 NEPTUN LIGHT, Inc.

