




Commercial Products & Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > 43828**43828 – MVR400/U**


GE Multi-Vapor® Quartz Metal Halide ED37

**GENERAL CHARACTERISTICS**


Lamp type	High Intensity Discharge - Quartz Metal Halide
Bulb	ED37
Base	Mogul Screw (E39)
Bulb Finish	Clear
Wattage	400
Rated Life (Hor)	15000 hrs
Rated Life (Vert)	20000 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open Fixture-Restricted Position (S-Rated)



Bulb



Base

[View Larger](#)**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens (Hor)	33100
Initial Lumens (Vert)	36000
Mean Lumens (Hor)	22100
Mean Lumens (Vert)	23500
Color Temperature	4000 K
Color Rendering Index (CRI)	65
Effective Arc Length	1.200000 in (30.480000 mm)

ELECTRICAL CHARACTERISTICS

Burn Position	Universal burning position
Open Circuit Voltage (peak lead ballast) (MIN)	540 V
Open Circuit Voltage (RMS lag ballast) (MIN)	382 V
Warm Up Time to 90% (MIN)	2 min
Warm Up Time to 90% (MAX)	5 min
Hot Restart Time to 90% (MIN)	10 min
Hot Restart Time to 90% (MAX)	15 min

DIMENSIONS

Maximum Overall Length (MOL)	11.5000 in (292.1 mm)
Nominal Length	11.500 in (292.1 mm)
Bulb Diameter (DIA)	4.625 in (117.4 mm)


ADDITIONAL RESOURCES[Catalogs](#)[Testimonials](#)**Brochures**

Application/Segment Brochures

- [Canopy Lighting](#)
- [Contractor Lighting](#)
- [Restaurant Lighting](#)
- [Retail Lighting](#)

Product Brochures

- [HID Lamps](#)
- [Metal Halide Lamps](#)

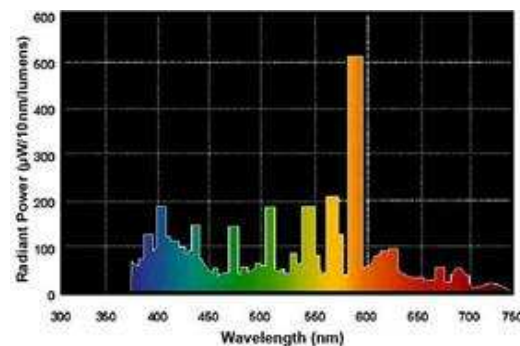[MSDS \(Material Safety Data Sheets\)](#)[Disposal Policies & Recycling Information](#)**GRAPHS & CHARTS****Spectral Power Distribution**

Light Center Length (LCL) 7.000 in (177.8 mm)

PRODUCT INFORMATION

Product Code	43828
Description	MVR400/U
ANSI Code	M59
Standard Package	Case
Standard Package GTIN	10043168438282
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168438285

COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
42670	1110-247SC-TC	1	90.0	1.0
80728	1111-247SCTC000I	1		1.0
86803	GEM40048TAC4-5	1	90.0	1.0
86814	GEM400MLTAC4-5	1	90.0	1.0

CAUTIONS & WARNINGS

R- WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information:
<http://www.fda.gov/cdrh/radhealth/products/urburns.html>

[See list of cautions & warnings.](#)

[Return To Top](#)

Home | Products | EliteNet | Education/Resources | Lighting Applications | Where to Buy | FAQs | Contact Us | Site Map
 Products for Your Home | Press Room | Corporate | Investor Information | Privacy Policy | Accessibility Statement | Terms of Use

Copyright General Electric Company 1997-2008