

## PRODUCT SPECIFICATION SHEET

**Model #: 80232**

**Description: DB-2S39-PS-MV**

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>· Line Voltage: 120-277V 50/60Hz</li> <li>· Series Lamp Operation</li> <li>· Lamp End of Life Protection</li> </ul> | <ul style="list-style-type: none"> <li>· Program Start</li> <li>· Active Power Factor Correction</li> <li>· Type CC</li> </ul> |
|--|--|

Lamp Type			Min. Start Temp. (F/C)	Vin (V)	Iin (A)	Pin (W)	ATHD ≤%	PF ≥	CF ≤	BF	BEF
Type	No.	Watts									
* F39T5/HO	2	39	0/-18	120	0.71	85	10	0.98	1.7	1.00	1.17
F24T5/HO	2	24	0/-18	120	0.44	52	10	0.98	1.7	1.00	1.92
* F39T5/HO	1	39	0/-18	120	0.40	47	10	0.98	1.7	1.03	2.19
F24T5/HO	1	24	0/-18	120	0.26	31	10	0.98	1.7	1.03	3.32
* F39T5/HO	2	39	0/-18	277	0.31	84	10	0.97	1.7	1.00	1.19
F24T5/HO	2	24	0/-18	277	0.19	51	10	0.97	1.7	1.00	1.95
* F39T5/HO	1	39	0/-18	277	0.18	47	20	0.95	1.7	1.03	2.19
F24T5/HO	1	24	0/-18	277	0.12	31	20	0.90	1.7	1.03	3.32

Note: the above data is tested at 60Hz. Application and Performance Specification Information Subject to Change without Notification.

**Performance**

- Meets ANSI Standard C82.11-2005
- Meets ANSI Standard C62.41-2002
- Meets FCC 18 Non CONSUMER Limits

**Application**


- Maximum Ambient Temperature: 131°F, 55°C
- Remote Mounting: 18 ft. max. Lead length, 18AWG
- Sound Rated: A
- Maximum case temperature Tc: 194°F, 90°C

**Safety**

- No PCB's, Type HL
- UL & cUL listed (Class P, Type 1 Outdoor)
- OCV 300V
- No-load: 5 Watt

**Physical Parameters**

- |                         |                    |
|-------------------------|--------------------|
| Length * Width * Height | 9.5" * 1.3" * 1.0" |
| Mounting                | 8.9"               |
| Weight                  | 1.10 lbs           |
| White, Black            | 25"(±1")           |
| Yellow                  | 27"(±1")           |
| Red/ Blue               | 23"(±1")           |

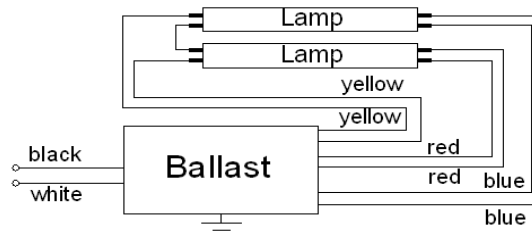

- Note: 1. For one lamp application, cap both yellow leads insulating to 300 volts and connect red and blue leads to each side of one lamp.
2. If you change one lamp without turning off the supply, please twist the other lamp when the lamps are not lighted.