

## Specifications:

|                     |            |                            |
|---------------------|------------|----------------------------|
| Lamp Type           | LED        |                            |
| Lamp Wattage        | Red        | 120VAC, 60Hz, 0.031A, 3.2W |
|                     |            | 277VAC, 60Hz, 0.010A, 3.6W |
|                     | Green      | 120VAC, 60Hz, 0.033A, 3.8W |
|                     |            | 277VAC, 60Hz, 0.017A, 4.4W |
| Emergency Operation | 90 minutes |                            |


## Listings & Certifications:



## Model: FHEX21



## Mechanical Data:

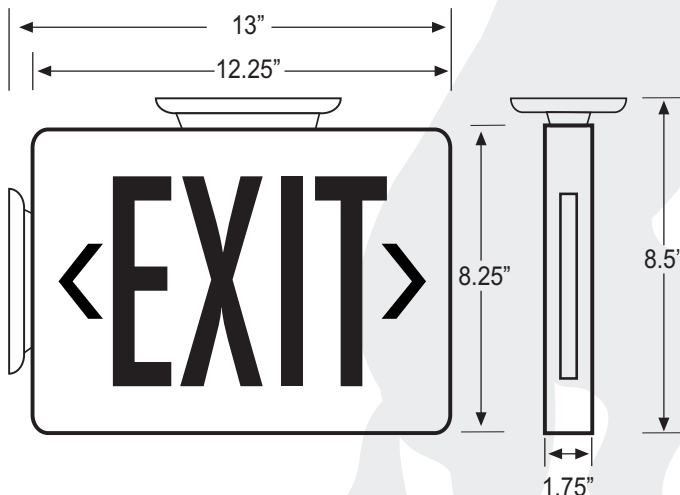

Multiple mounting options shown.

## Standard Features:

- Push-to-test Switch
- LED Charge Indicator
- Maintenance Free, 6V Sealed Lead-Acid Battery
- Dual Voltage 120V/277V
- Specification Grade Design
- Universal Mount
- Long Life Energy Saving LED light source
- Field replaceable snap out/in chevron directional indicator.
- Snap-fit faceplate installs without use of tools
- Universal single face and double face (extra faceplate included)
- Universal mounting pattern knockout in backplate for J-box mounting
- Damp Location Listed

## Ordering Information:

| Base Model No. | Case Color | Letter Color | Operation           | Options              |
|----------------|------------|--------------|---------------------|----------------------|
| FHEX21         | W - White  | R - Red      | AC - AC Only        | DC - Dual Circuit    |
|                | B - Black  | G - Green    | EM - Battery Backup | RC - Remote Capable  |
|                |            |              |                     | SD - Self Diagnostic |

Build part number by adding Base Model No., one of each Case Color, Letter Color, Operation and desired options code(s). Example: FHEX21-B-G-EM-SD