


# SPECIFICATION SHEET : **NPY-120-126-CR**

This Is An Original Product From Fulham Co., Inc

Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,  
 \* Meets Energy Star 4.0 Criteria For Applications Listed.

**This Ballast Will Operate Following Lamps.**




FC8T9-22W

## ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	* FC8T9-22W	-	-	-	-	-	-	-	-
LAMPS OPERATED	1								
INPUT WATTS	22.07								
LINE CURRENT:	0.351								
POWER FACTOR	0.524								
BALLAST FACTOR	1.229								
EFFICACY FACTOR	5.569								
THD	156.80								
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)								
SOUND RATING	" A "								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	EOL								
MIN. OPERATING TEMP	0 °C ( 32 ° F )								
MAX. CASE TEMP	85 °C ( 185 ° F )								
ENERGY STAR 4.0	YES								
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								


## MECHANICAL DATA

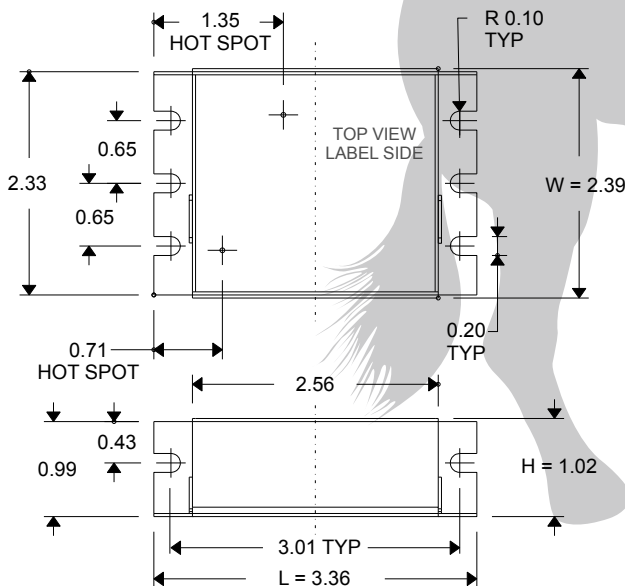

Where : L = Length, W = Wid th, H = Height

## WIRING DIAGRAMS

WIRE	BLACK	WHITE	YELLOW/WHITE	YELLOW/WHITE
LENGTH - INCHES	18 ± 1"	18 ± 1"	6 ± ½"	-----

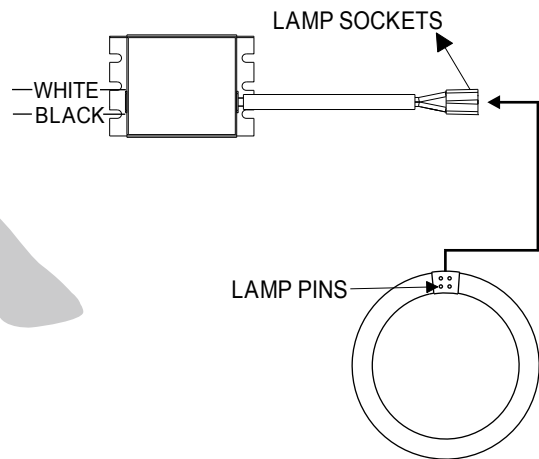

NOTE : This Ballast Case Must Be Grounded