

LED LR20 & LR30 Lamps

- 50,000 Hours average rated life, 120 Volts

Item #	Wattage	Description	Voltage	Number of LED's	Intensity per LED (mcd)	Lumens	Base	M.O.L. (inches)	Diameter (inches)
LR20AMB	4	LED R20 Lamp, Amber	120	66	800	-	Medium	3.8	2.5
LR20BL	4	LED R20 Lamp, Blue	120	66	1000	-	Medium	3.8	2.5
LR20GR	4	LED R20 Lamp, Green	120	66	3000	-	Medium	3.8	2.5
LR20RD	4	LED R20 Lamp, Red	120	66	2500	-	Medium	3.8	2.5
LR20WH30K	4	LED R20 Lamp, White, 3000K	120	66	2500	130	Medium	3.8	2.5
LR20AMBWH30K	4	LED R20 Lamp, Amber/White, 3000K	120	66	800/2500	100	Medium	3.8	2.5
LR30AMB	6	LED R30 Lamp, Amber	120	118	800	-	Medium	5.2	3.8
LR30BL	6	LED R30 Lamp, Blue	120	118	1000	-	Medium	5.2	3.8
LR30GR	6	LED R30 Lamp, Green	120	118	3000	-	Medium	5.2	3.8
LR30RD	6	LED R30 Lamp, Red	120	118	2500	-	Medium	5.2	3.8
LR30WH30K	6	LED R30 Lamp, White, 3000K	120	118	2500	230	Medium	5.2	3.8
LR30AMBWH30K	6	LED R30 Lamp, Amber/White, 3000K	120	118	800/2500	180	Medium	5.2	3.8

Applications


- Downlights, recessed lighting, accent lighting
- Ideal for applications with hard to reach areas or vibration

Features and Benefits


- Long life: 50,000 hours
- UL Wet Location Rated
- Rated for continuous operation
- Excellent color consistency from bulb to bulb
- No need for frequent bulb replacements or relamping
- Excellent for rapid cycling applications
- Rated for outdoor & indoor applications

Specification

Input Line Voltage ----- 120VAC
 Input Line Frequency ----- 60HZ
 Lamp Life (rated) ----- 50,000 Hours
 Minimum Starting Temperature ----- -20 ° F
 Maximum Operating Temperature ----- 160 ° F
 U.L. / C.U.L. Listed ----- Yes
 Power Factor ----- > .63 – .73
 Total Harmonic Distortion ----- < 33%

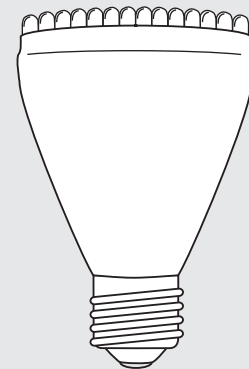

LR20

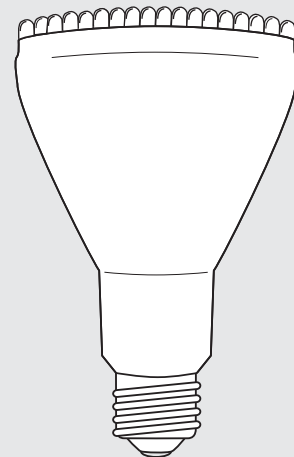

LR30

5 YEAR
WARRANTY

