



Deco Series Lamp Specifications

SpringLamp® Compact Fluorescent, NPF


- NPF, 8,000 Hours average rated life

Item #	Lamp Type	Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	M.O.L. (Inches)	Diameter (Inches)	Life vs. Candelabra
10702	Medium	2	10	80	.03A	4.4	1.5	5X
10702C	Candelabra	2	10	80	.03A	4.5	1.5	5X
10704	Medium	4	15	195	.07A	4.4	1.5	5X
10704C	Candelabra	4	15	195	.07A	4.4	1.6	5X
10709	Medium	9	40	425	.16A	4.8	1.8	5X
10709C	Candelabra	9	40	425	.16A	4.4	1.8	5X
10714	Medium	14	60	720	.20A	5.4	1.8	5X
10714C	Candelabra	14	60	720	.20A	5.4	1.9	5X

Applications:

Ideal for:

- Decorative Fixtures
- Enclosed Outdoor Fixtures.





Features and Benefits

- Long life CFL, 8,000 hour average rated life
- NEW Amalgam technology- provides cooler operating temperatures for consistent performance in any position
- No lead glass- Better lumen maintenance over life of bulb
- 2700°K color temperature closest to incandescent light
- Medium base or candelabra base available
- Replace less often, ideal for hard to reach places
- U.L. Listed for wet locations - use indoors or outdoors
- 12 Month Warranty
- Quickstart technology - fast run up time

Specifications (at full brightness)

End of Life Protection-----	Yes
Ballast Type -----	Electronic
Starting Method -----	Modified Rapid Start
Input Line Voltage -----	120VAC
Input Line Frequency -----	50/60HZ
Lamp Life (rated) -----	8,000 Hours
Color Temperature -----	2700°K
Color Rendering Index -----	82
Min. Starting Temperature -----	-20 ° F
Max. Operating Temperature --	160 ° F
U.L. / C.U.L. Listed -----	Yes
FCC Compliance -----	Part 18, Subpart C
Lamp Operating Frequency ---	45 KHZ
Lamp Current Crest Factor ----	< 1.60
Max. Open Circuit Voltage -----	600V
Power Factor -----	> .50
Total Harmonic Distortion -----	< 150%

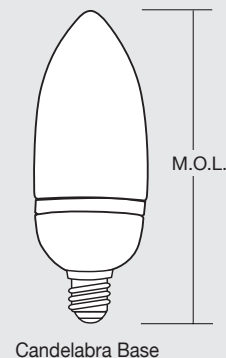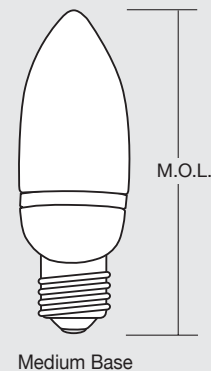

Special Application Options: (Ordering Suffix)

- 3100°K (31K), 3500°K (35K), 4100°K (41K), 5100°K (51K), 6500°K (65K),



12 MONTH WARRANTY