




113/213 Series A-Lamp Specifications

SpringLamp® Compact Fluorescent A-Lamp

• NPF, 8,000 Hours average rated life

Ideal for:



Item #	Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	M.O.L. (inches)	Diameter (inches)	Life vs. Incandescent	Table/ floor Lamps	Chandeliers	Recessed Cans	Bare bulb Fixtures	Wall Sconce	Ceiling Fixtures	Desk Lamp	Outdoor Lights
11304	4	25	225	.09A	3.9	1.8	2.5X	•	•	•	•	•	•	•	•
11309 ★	9	40	450	.15A	4.1	2.2	5X	•	•	•	•	•	•	•	•
21314 ★	14	60	700	.20A	4.5	2.4	5X	•	•	•	•	•	•	•	•
21314Y ☼	14	60	600	.20A	4.4	2.4	6X	•		•	•	•			•
11316 ★	16	60	770	.27A	5.9	2.7	5X	•		•	•	•			•
11319	19	60	900	.32A	5.9	2.7	5X	•		•	•	•			•
11323	23	100	1300	.38A	6.1	2.7	5X	•		•	•	•			•


★ = Energy Star ☼ Yellow, Bug Light

Features and Benefits

- NEW Small size
- NEW Amalgam Technology- provides cooler operating temperatures for consistent performance in any position
- Long life, **8,000 hour** average rated life
- **No lead glass**- Better lumen maintenance over life of bulb
- 2700°K color temperature closest to incandescent light
- Medium base
- Replace less often, ideal for hard to reach places
- End of Life logic guards against violent failures
- 12 Month Warranty
- U.L. Listed for wet locations – use indoors and outdoors

Specifications (at full brightness)

End of Life Protection----- Yes
 Ballast Type ----- Electronic
 Starting Method ----- Modified Rapid Start
 Input Line Voltage ----- 120VAC
 Input Line Frequency ----- 50/60HZ
 Lamp Life (rated) ----- 8,000 Hours
 Color Temperature ----- 2700°K
 Color Rendering Index ----- 82
 Minimum Starting Temperature ----- -20 ° F
 Maximum Operating Temperature ----- 160 ° F
 U.L. / C.U.L. Listed ----- Yes
 FCC Compliance ----- Part 18, Subpart C
 Lamp Operating Frequency ----- 45 KHZ
 Lamp Current Crest Factor ----- < 1.60
 Maximum Open Circuit Voltage ----- 600V
 Power Factor ----- > .50
 Total Harmonic Distortion ----- < 150%

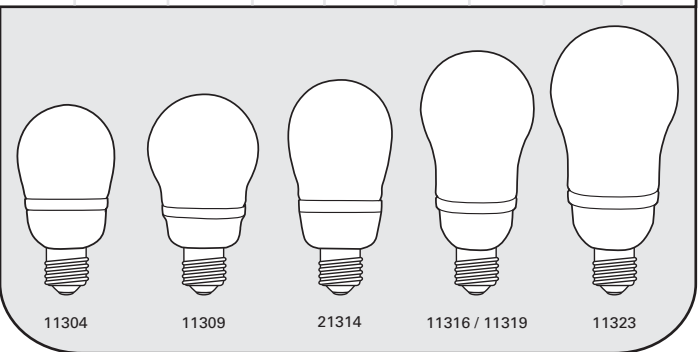


Special Application Options: (Ordering Suffix)

- 3100°K (31K), 3500°K (35K), 4100°K (41K), 5100°K (51K), 6500°K (65K)
- 11304 available in Red (RD), Green (GR), Blue (BL)

Energy Savings (SpringLamp® compared to incandescent)

Save electricity costs by using less wattage with the same light output as an incandescent.

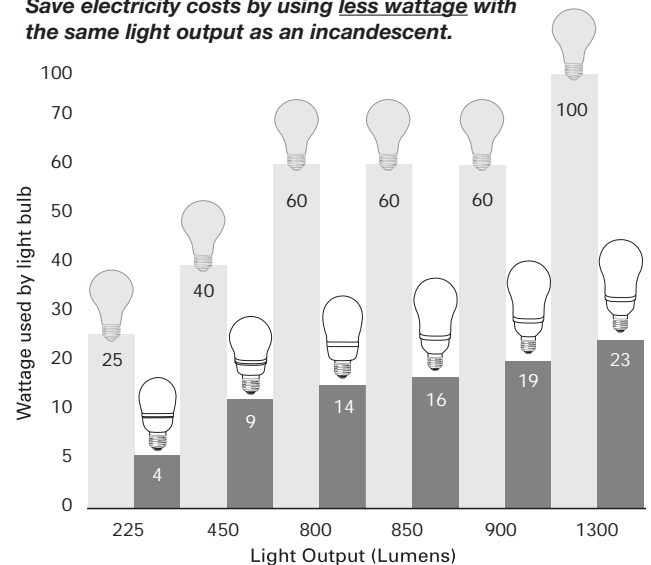

12 MONTH WARRANTY