



NEW! TCP T3 ultra-compact fluorescent SpringLamps®

- 12,000 Hours average rated life, 120Volts


Item #	Description	Incandescent Wattage Comparison	Initial Lumens	M.O.L. (inches)	Diameter (inches)	Lamp Life (Hours)	Picograms
48909	9 Watt T3 CFL	40	550	3.5	1.8	12000	260
48913	13 Watt T3 CFL	60	925	3.9	1.8	12000	169
48918	18 Watt T3 CFL	75	1300	4.0	2.4	12000	120
48923	23 Watt T3 CFL	100	1650	4.4	2.4	12000	95

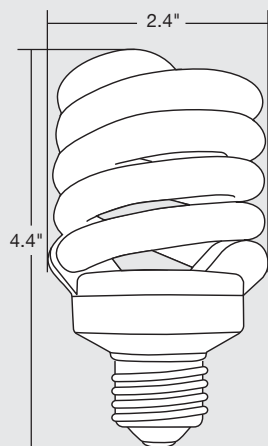


48923

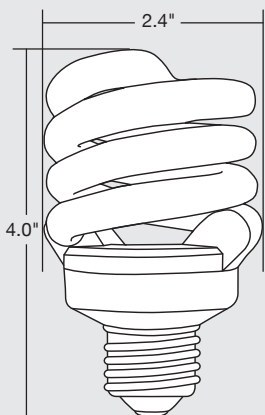

48918

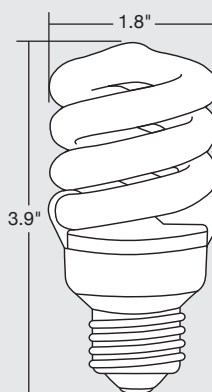

48913

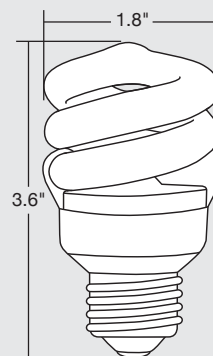

48909

Applications

- Excellent choice for all general lighting areas
- Provides great light output and color rendition
- Accent and decorative lighting – such as chandeliers, ceiling fans, indoor/outdoor fixtures
- Ideal for applications with hard to reach areas and small fixtures
- UL approved for totally enclosed fixtures

Features and Benefits

- Compact size fits more applications
- Provides more light and better lumen maintenance
- Available in all color temperatures
- End-of-life circuit design meets new Euro IEC and UL standard, 1993, 3rd Edition.
- RoHS Compliant

Specification

End of Life Protection	Yes
Ballast Type	Electronic
Input Line Voltage:	120VAC
Input Line Frequency	50/60HZ
Lamp Life (Rated)	12,000 hrs
Color Temperature	2700°K
Color Rendering Index	82
Minimum Starting Temp	-20°F
Maximum Operating Temp	160°F
UL/cUL Listed	Yes
Lamp Operating Frequency	45 KHZ
Lamp Current Crest Factor	<1.60
Maximum Open Circuit Voltage	600V
Power Factor	>.50
Total Harmonic Distortion	<150%
Mercury	1.5 mg

24 MONTH WARRANTY