



DYNASTY™

LIGHT REDEFINED

DYNASTY® B10 LED CANDELABRA LAMP
1.7 WATT, 120 VOLT

The Dynasty® LED series has achieved what many thought was not possible, LED lighting that performs as good or better than the traditional lamp it is replacing. Our unique lighting products are redefining the current LED landscape, which is filled with one directional, highly concentrated points of light. The secret is the light source itself; a 360° horizontal, 275° vertical beam pattern (we call it the Dynasty®). There is no other LED on the market that compares to traditional light sources as well as the Dynasty® LED, making it even easier to choose energy efficient, earth friendly products for your lighting needs. For more Dynasty® based lighting products, just look for the butterfly!



Applications*

- Chandeliers
- Wall Sconce
- Carriage Light
- Vanity Light

Features

- Warm White, 2700K
- Vibration Resistant
- 35,000 Hour Life
- Unique Butterfly-Beam™ (360° Horizontal and 275° Vertical)
- Exact B10 Footprint/Shape

Benefits

- Energy Efficient
- Long Life
- Environmentally Friendly
- RoHS Compliant
- Non-Hazardous Waste
- Low Carbon Footprint



* NOT TO BE OPERATED IN
DIMMABLE APPLICATIONS

ISO 9000 CERTIFIED
EN 13485 CERTIFIED
TS 16949 CERTIFIED FACTORY

The new Dynasty® Candelabra LED Lamp is designed specifically as an energy-saving alternative for traditional candelabra bulbs. This compact lamp operates on a 120 volt system, and can be inserted into any E12 candelabra base. It is designed with CAO Group's patented Dynasty® high flux LED, which is energy efficient, vibration resistant, and features a multi-directional beam pattern making it ideal for general lighting applications. There are no hazardous waste materials, and it is RoHS compliant.




DYNASTY® CANDELABRA LED LAMP

PRODUCT NUMBER	ORDERING ABBREVIATION	WATTS	BULB	BASE	VOLTS	PKG QTY	DESCRIPTION	AVG RATED LIFE (HRS)	APPROX. LUMENS	CRI	CCT	LCL INCH/MM	MOL INCH/MM
30021	1.7B10C/27K/LED/BT/1PK	1.7	B10	E12 (CAND)	120	25	CLEAR, WARM WHITE, BENT TIP, 1PK BOX	35,000	60	65	2700K	2.17/55.0	3.87/98.3
30022	1.7B10C/27K/LED/BT/F/1PK	1.7	B10	E12 (CAND)	120	25	FROSTED, WARM WHITE, BENT TIP, 1PK BOX	35,000	60	65	2700K	2.17/55.0	3.87/98.3
30023	1.7B10C/27K/LED/BT	1.7	B10	E12 (CAND)	120	25	CLEAR, WARM WHITE, BENT TIP, TRAY PACK	35,000	60	65	2700K	2.17/55.0	3.87/98.3
30024	1.7B10C/27K/LED/BT/F	1.7	B10	E12 (CAND)	120	25	FROSTED, WARM WHITE, BENT TIP, TRAY PACK	35,000	60	65	2700K	2.17/55.0	3.87/98.3

MECHANICAL DIMENSIONS

DIMENSION	DESCRIPTION	INCH	MILLIMETER
LCL	LIGHT CENTER LENGTH	2.17	55.0
DIA	MAXIMUM DIAMETER	1.26	32.0
MOL	MAXIMUM OVERALL LENGTH	3.87	98.3

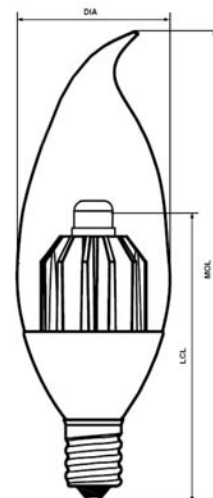

ISO 9000 CERTIFIED
EN 13485 CERTIFIED
TS 16949 CERTIFIED FACTORY