



# EYE LIGHTING INTERNATIONAL OF NORTH AMERICA, INC.

A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Home About Us Products How to buy Trade Shows Trade Associations Industry Links Lighting FAQs Lighting Library

## MR16 - 24V

### EYE Dichro-Cool®

#### Features



- 24V operation
- Crisp, white light
- Long lasting Dichroic coating
- Consistent light color and brightness

#### Applications

- Aircrafts
- Boat Cabins
- 24V lighting system
- Automotive

24V Dichroic Reflector 2-pin Base - GU5.3 with Cover Glass											
Watts	Volts	Base	Product	Product	Product	Case	Ctr. Beam	Average	Color	Filament	Beam Spread
(W)	(V)		Code	Description	Comparison Guide	Qty.	Intensity (cd)	Life	Temp (K)		Data
35	24	GU5.3	75464	JR7351	35MR16CG/11724V/(FRB)	12	5900	5000	3 050	CC-6	1
	24	GU5.3	75513	JR7352	35MR16CG/23724V/(FRA)	12	1700	5000	3 050	CC-6	2
	24	GU5.3	75562	JR7353	35MR16CG/40724V/(FMW)	12	870	5000	30 50	CC-6	3
50	24	GU5.3	75611	JR7551	50MR16CG/12724V/(EXT)	12	8600	5000	3 050	CC-6	4
	24	GU5.3	75660	JR7552	50MR16CG/26724V/(EXZ)	12	2600	5000	3 050	CC-6	5
	24	GU5.3	75709	JR7553	50MR16CG/40724V/(EXN)	12	1500	5000	3 050	CC-6	6

- The intensity level at the center of the beam is shown in footcandles.
- Beam diameter in inches is shown at a distance of 3 ft. 3 in., 6 ft. 7 in., and 9 ft. 10 in.
- The intensity level at the outer edge of the beam diameter is 50% of the center beam footcandle reading.

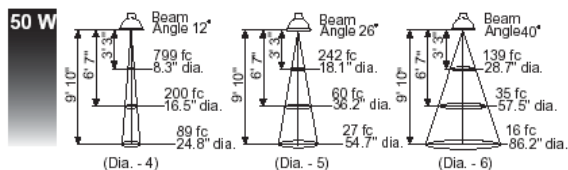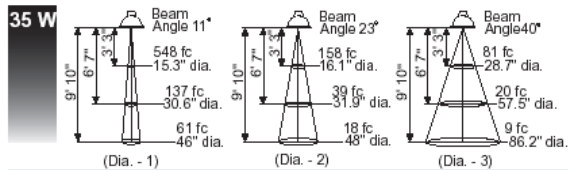

--top--