



**EYE LIGHTING INTERNATIONAL  
OF NORTH AMERICA, INC.**  
A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Home About Us Products How to buy Trade Shows Trade Associations Industry Links Lighting FAQs Lighting Library

**MR16 - 4200K**

**EYE Dichro-Cool®**

**Features**


- White light - color temperature 4200K

**Applications**

- Jewelry
- Displays
- Museums
- Beauty Salons
- Florists
- Landscape
- Retail Stores

12V Dichroic Reflector 2-Pin Base - GU5.3 with Cover Glass											
Watts	Volts	Base	Product	Product	Product	Case	Ctr. Beam	Average	Color	Filament	Beam Spread
(W)	(V)		Code	Description	Comparison Guide	Qty.	Intensity (cd)	Life	Temp (K)		Data
20	12	GU5.3	72188	JR1256	20MR16CG/38°/4200K/(BAB)	12	220	4000	4200	C-6	1
35	12	GU5.3	72771	JR1356	35MR16CG/38°/4200K/(FMW)	12	500	5000	4200	C-6	2
50	12	GU5.3	74392	JR1580	50MR16CG/38°/4200K/(EXN)	12	840	5000	4200	C-6	3
	12	GU5.3	74420	JR1581	50MR16CG/56°/4200K/(FNV)	12	300	5000	4200	C-6	4

- The intensity level at the center of the beam is shown in footcandles.
- Beam diameter in inches is shown at a distance of 3 ft. 3 in., 6 ft. 7 in., and 9 ft. 10 in.
- The intensity level at the outer edge of the beam diameter is 50% of the center beam footcandle reading.

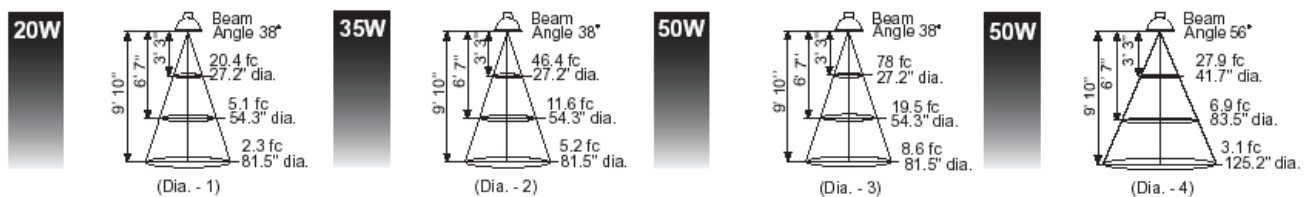

--top--