



Slimline F72T12 D ALTO

Product family description
T12 Single Pin Linear Fluorescent Lamps.

Features/Benefits


- Instant Start.

Notes


- Rated average life under specified test conditions with lamps turned off and restarted no more frequently than once every 3 operating hours. Lamp life is appreciably longer if lamps are started less frequently. (202)
- Approximate Initial Lumens. The lamp lumen output is based upon lamp performance after 100 hours of operating life, when the output is measured during operation on a reference ballast under standard laboratory conditions. (203)
- For expected lamp lumen output, commercial ballast manufacturers can advise the appropriate Ballast Factor for each of their ballasts when they are informed of the designated lamp. The Ballast Factor is a multiplier applied to the designated lamp lumen output. (204)
- Design Lumens are the approximate lamp lumen output at 40% of the lamp's Rated Average Life. This output is based upon measurements obtained during lamp operation on a reference ballast under standard laboratory conditions. (208)

Product data	
Product Number	369850
Full product name	Slimline F72T12 D ALTO
Ordering Code	F72T12/D/ALTO
Pack type	1 Lamp
Pieces per Sku	1
Skus/Case	15
Pack UPC	046677369859
EAN2US	
Case Bar Code	50046677369854
Successor Product number	
Base	Single Pin [Single Pin Fluorescent]
Base Information	Green Base
Bulb	T12
Packing Type	1LP [1 Lamp]

Product data	
Packing Configuration	15
Type	F72T12
Feature	ALTO®
Rated Avg. Life [3 hr Start]	12000 hr
Ordering Code	F72T12/D/ALTO
Pack UPC	046677369859
Case Bar Code	50046677369854
Energy Saving	Not Applicable
Watts	56W
Mercury (Hg) Content	6.8 mg
Color Code	54
Color Rendering Index	79 Ra8
Color Designation	Daylight [Daylight]
Color Temperature	6500 K
Initial Lumens	3800 Lm
Design Mean Lumens	3350 Lm
Nominal Length [inch]	72
Product Number	369850



F- T12- IS FA8/GB

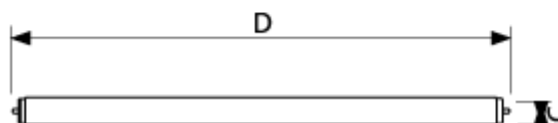

F- T12- IS FA8

