


CFL-A19™ & CFL-A21™

ELECTRONIC BULBS

New! Product Information Bulletin

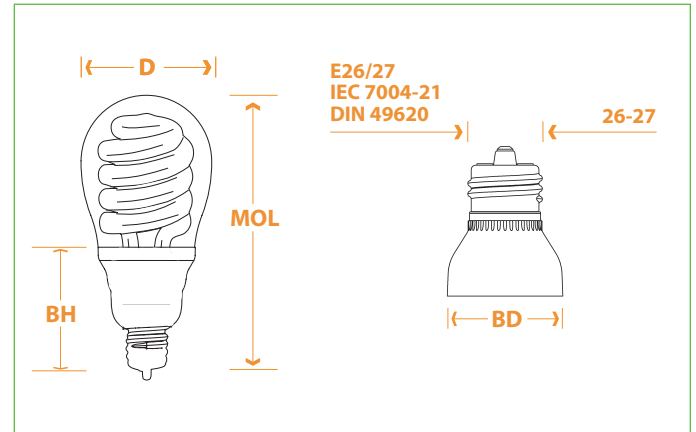

Technical Data

CFL-A™ Electronic, NPF, Medium Base (E26/27), 120VAC- 50/60Hz, 8,000 Hours Average Life													Incandescent bulb		
Item Number	Watts	Input Line Current	Power Factor	THD	M.O.L. (Inch)	D (Inch)	BD (Inch)	BH (Inch)	Color Temp. (°K)	CRI	Lumens	Lm/W	Watts	Lumens	Lm/W
62123	23	0.35 A	>0.50	<150%	5.50	2.625	1.57	2.35	2750	>82	1300	57	100	1450	15
61920*	20	0.30 A	>0.50	<150%	5.50	2.625	1.57	2.35	2750	>82	1100	55	85	1230	15
61916*	16	0.24 A	>0.50	<150%	5.00	2.375	1.57	2.35	2750	>82	900	56	70	950	14
61914	14	0.22 A	>0.50	<150%	5.00	2.375	1.57	2.35	2750	>82	800	57	60	900	15
61909	9	0.14 A	>0.50	<150%	4.75	2.375	1.57	2.35	2750	>82	450	50	35	500	14

APPLICATION INFORMATION: TO BE USED WITH TABLE LAMPS • PENDANT LAMPS • DESK LAMPS • OUTDOOR FIXTURES • TRACK LIGHTS • RECESSED CANS • WARDROBE CLOSETS • DRIVEWAYS • WALKWAYS • YARDS & GARDENS • OPEN & TOTALLY ENCLOSED FIXTURES • USE WITH OCCUPANCY SENSORS MADE BY NEPTUN • AND MORE

Features and Benefits

- * New! Patented design for direct replacement of incandescent light bulbs of A21 and A19 style
- * Saves up to 80% energy with comparable light output
- * Color Temperature of 2700°K - 2750°K: Matching incandescent bulbs
- * New! Patented glass cover frosted outside: For improved heat transfer
- * New! Patented Amalgam Technology: Any working position with stable light output
- * Superior Lumen Maintenance
- * Rapid Start electronic ballast with End of Life protection and Electronic-Preheat
- * High Luminous Efficiency: Up to 57 Lm/W
- * Designed for totally enclosed fixtures
- * Indoor or Outdoor

NEPTUN LIGHT, Inc.
 service@neptunlight.com
 Tel. 1-847-735-8330
 Toll Free: 1-888-735-8330



© Copyright 2008 NEPTUN LIGHT, Inc.