

Architectural MSD

MSD 700 1CT

The high luminous efficacy and optimal lamp filling of the single ended Architectural MSD lamps create high beam intensity and excellent color rendering. While the compact arc of the lamp allows efficient beam control and high intensity. Ideal to illuminate architecture of all types at night.



Product data

• General Characteristics

System Description	-
Cap-Base	G22
Cap-Base Information	-
Operating Position	any
Main Application	Studio/Disco
Life to 50% failures	3000 hr
EM	

• Light Technical Characteristics

Color Code	-
Color Rendering Index	75 Ra8
Color Temperature	6000 K
Color Temperature Technical	5900 K
Chromaticity Coordinate X	323 -
Chromaticity Coordinate Y	328 -
Luminous Flux Lamp EM	46000 (min), 50500 (nom) Lm
Luminous Efficacy Lamp EM	72 Lm/W

• Electrical Characteristics

Watts	700 W
Lamp Wattage Technical	700 W

Lamp Current	11 A
Ignition Supply Voltage	207 (min) V
Dimmable	Yes

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	600 (max) C

• Product Dimensions

Overall Length C	175 (max) mm
Diameter D	40 (max) mm
Width F	52 (min), 53 (nom), 54 (max) mm
Light Center Length L	84 (min), 85 (nom), 86 (max) mm
Arc Length O	10 mm

• Product Data


Product number	245530
Full product name	MSD 700 1CT
Short product name	MSD 700.1CT/3
Pieces per Sku	1
eop_pck_cfg	3
Skus/Case	3
Bar code on pack	8727900911299
Bar code on case	8727900911305
Logistics code(s)	928170405114
eop_net_weight_pp	0.147 kg



PHILIPS


sense and simplicity

Dimensional drawing


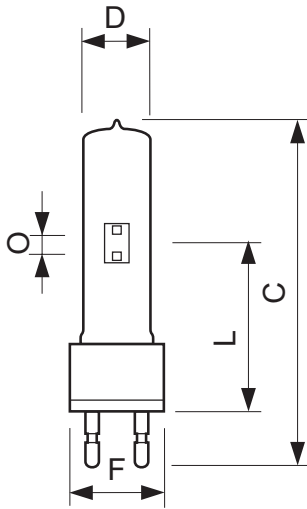


G22

Product	C (Max)	D (Max)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)	O (Max)	T (Max)
MSD 700	175	40	52	53	54	84	85	86	10	-	-



Photometric data

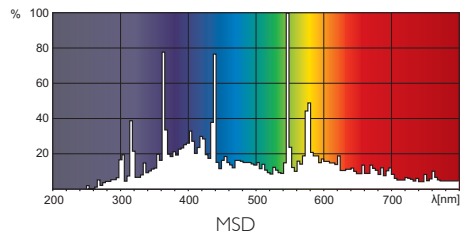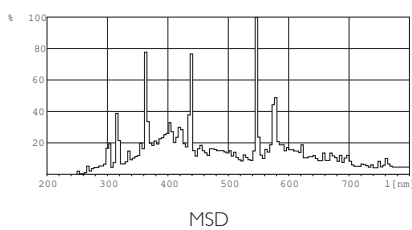

© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, April 13
data subject to change