



# LOS2500/120



JOB NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

## DESCRIPTION

360° view Super Ceiling Sensor with Triple Overlapping Coverage for super sensitivity. No extra wires to run or extra boxes to install. Covers 2152 sf @ 9' height.

## SPECIFICATIONS

### UL Listing

For indoor applications. Tuff Dome & Smart Box are UL Listed for wet locations.

### Easy Installation

Relay and sensor all in one reduces installation cost. Compatible with most dimmers and electronic ballasts. Not compatible with instant start ballasts. LED testing and operation indicator.

### Maximum Reliability

Adjustable detector sensitivity for superior detection.

### Maximum Versatility

Adjustable time delay. Sensor detection pattern can be customized. No minimum load requirement. Can be wired in parallel.

### Coverage Area

2152sf @ 9'

### Incandescent Watts Switched

2000 watts

### Fluorescent Watts Switched

2000 watts

### Ratings Amps Horsepower

16 amps 6.7 horsepower

### Power Consumption

Negligible

### Time Delay

10 seconds to 15 minutes

### Manual Switch

None

### Adjustments

Photo Time Sensitivity

### Detection

360° view Super Ceiling Sensor

### Patents

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.


### Color

White


### Weight

0.6

## DIMENSIONS

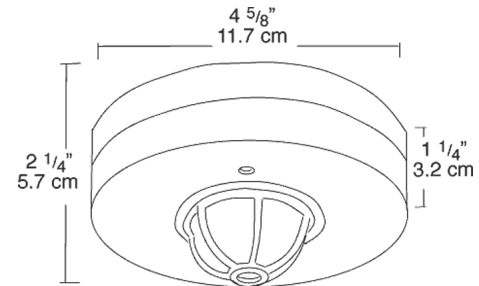

## DETECTION PATTERN

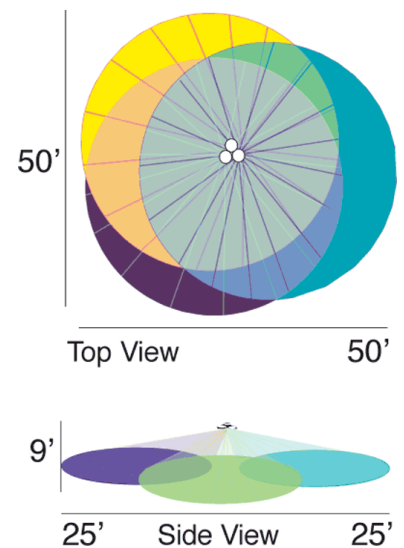

Note: Specifications may change without notice