



LOS2500/277



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

360° view Super Ceiling Sensor with Triple Overlapping Coverage for super sensitivity. No extra wires to run or extra boxes to install. Covers 2152 sf @ 9' height.

SPECIFICATIONS

UL Listing

For indoor applications. Tuff Dome & Smart Box are UL Listed for wet locations.

Easy Installation

Relay and sensor all in one reduces installation cost. Compatible with most dimmers and electronic ballasts. Not compatible with instant start ballasts. LED testing and operation indicator.

Maximum Reliability

Adjustable detector sensitivity for superior detection.

Maximum Versatility

Adjustable time delay. Sensor detection pattern can be customized. No minimum load requirement. Can be wired in parallel.

Coverage Area

2152sf @ 9'

Incandescent Watts Switched

1500 watts

Fluorescent Watts Switched

1500 watts

Ratings Amps Horsepower

5.4A amps 3.35 horsepower

Power Consumption

Negligible

Time Delay

10 seconds to 15 minutes

Manual Switch

None

Adjustments

Photo Time Sensitivity

Detection

360° view Super Ceiling Sensor

Patents

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.


Color

White


Weight

0.6

DIMENSIONS

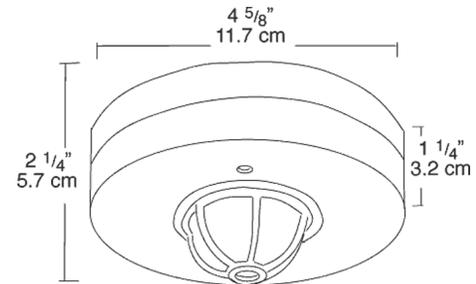

DETECTION PATTERN

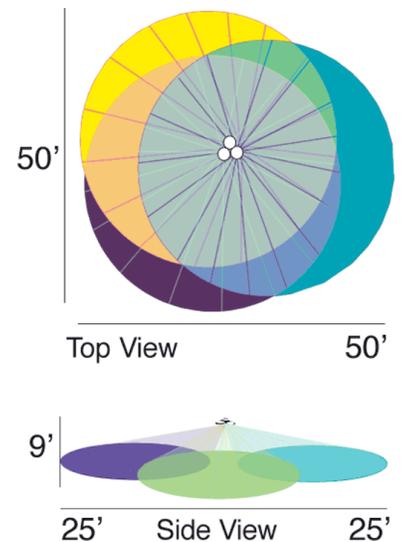

Note: Specifications may change without notice