



LOS800W/120



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Fits decorator wall plates with only 1/2" protrusion. 120 volts. Gangable. Full 180° view covers 1000 sq. ft Works with electronic ballasts. Can be wired in parallel. LED indicator, wallplate included. Can also be used as a ceiling sensor. Must have hot and wires in box.

SPECIFICATIONS

UL Listing

Indoor applications Smart Box & Tuff Dome
 Wet locations

Compatibility

Compatible with most electronic ballasts.
 Not compatible with instant start ballasts.
 Can be wired in parallel

Maximum Energy Savings

Light only when you need it. No ON switch so lights are never left on by mistake.

Coverage Area

1000sf

Incandescent & Fluorescent Watts

Switched

800 watts @ 120 volts

Ratings

6.7 amps

Power Consumption

Negligible

Time Delay

8 seconds to 15 minutes

Manual Switch

On - Manual / Off - Auto

Ambient Light Sensing

n/a

Adjustments

Time

Detection

180° view covers 1000 sq. feet

Wiring

Hot & common

Patents

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.


Color

Ivory

Weight

0.3

DETECTION PATTERN

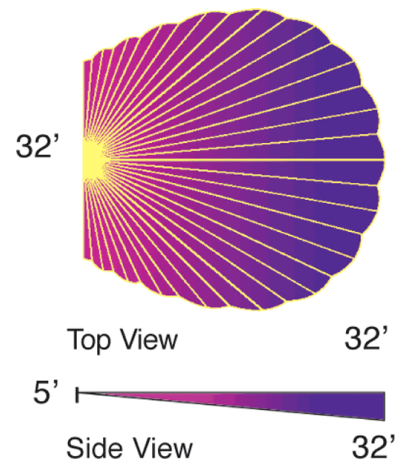

Note: Specifications may change without notice