

RAB LIGHTING

WPTS70



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

HPS "Tall" Wallpack. Vandal resistant polycarbonate housing. Heavy die-cast aluminum back plate with 1/2" bottom and back conduit knockout. Factory installed 120V photocell with bypass cap included. Glare shield included. Lamp supplied.

SPECIFICATIONS

UL Listing

Suitable for wet locations

Reflector

Die formed aluminum for wide light distribution. Moveable Glare Shield for field adjustable light control slanted slightly downward for more light on the job

Ballast Housing

Stamped steel painted white

Back Plate

Heavy die cast aluminum. 1/2" bottom conduit knockout. Knockouts for mounting to 3" or 4" junction boxes

Housing and Refractor

Vandal resistant polycarbonate molded refractor. Die cast aluminum back plate

Patents

The unique RAB Tallpack is protected by U.S. Patent D569,029; China Patent ZL200730149211.2; Taiwan Patent D124,864 and Canada Patent D121,993


Color

Bronze

Weight


6.18

DIMENSIONS

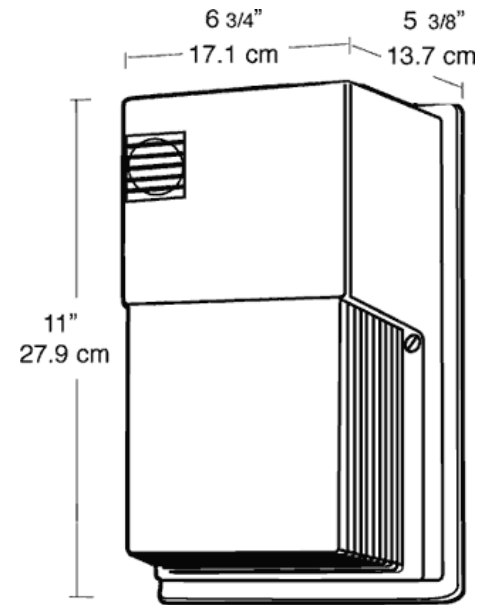

PHOTOMETRIC

70w HPS @ 10' Mounting Height

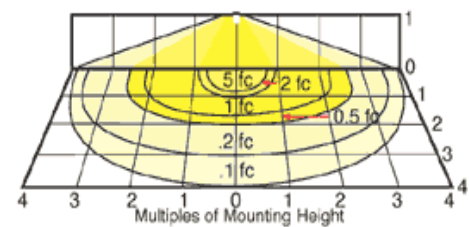

| Mounting Height | Multiplier | HPS | | CFL | |
|-----------------|------------|-------|------------|------------------|------------|
| | | Watts | Multiplier | Watts | Multiplier |
| 8' | 1.6 | 100 | 1.5 | 22 | .2 |
| 10' | 1.0 | 70 | 1.0 | 42 | .5 |
| 12' | .7 | 50 | .6 | | |
| 16' | .4 | 35 | .4 | | |
| 20' | .25 | | | | |
| | | MH | | Watts Multiplier | |
| | | 100 | 1.4 | | |

ORDERING INFORMATION

High Pressure Sodium
Lamp supplied with fixture

| Total Watts | Lamp Type | Lamp Base | Ballast |
|-------------|-----------|-----------|------------|
| 70 | ED17 | Medium | R-NPF 120V |

| Starting Amps/ Operating Amps | | | |
|-------------------------------|------|------|------|
| 120V | 208V | 240V | 277V |
| 2.1/1.6 | | | |

| Input Watts | LAMP ANSI | Initial Lumens | Lamp Hours |
|-------------|-----------|----------------|------------|
| 86.0 | S62 | 6300 | 24000 |

Factory Installed Options
Add suffix to Catalog Number

Tamperproof screws (/TP)
Swivel Photocontrol (/PCS)
Single fusing for 120 and 277 volt (/F)

Double fusing for 208 and 240 volt (/FF)
Button Photocontrol (/PC)

Note: Specifications may change without notice