


**TUNGSTEN HALOGEN LAMPS • SINGLE ENDED**  
**for ETC Source Four™, Source Four JR™ & Source Four PAR™**

**HPL SERIES**

- Only for Use in Approved Enclosed Halogen Fixtures
- More Fixture Light Output Using Less Electrical Energy
- Integral Heat Sink Base
- Low Seal Temperature

Watts	Ushio Ordering Code	Ushio Lamp Code	Description	Dimensions mm			Filament Type	Approx Lumens lm	Color Temp K	Avg Life h
				Dia (A)	OAL (B)	LCL (C)				
<b>Heat Sink Base – 77 Volt</b>										
550	1000668	HPL-550/77V+	JS77V-550WC	18.35	104	60.3	4-C8	16170	3250	300
550	1000669	HPL-550/77X+	JS77V-550WX	18.35	104	60.3	4-C8	12160	3050	2000
750	1000676	HPL-750/77V	JS77V-750WC	18.35	104	60.3	4-C8	22950	3250	300
<b>115 Volt</b>										
375	1000666	HPL-375/115V+	JS115V-375WC	18.35	104	60.3	4-C8	10540	3250	300
375	1000667	HPL-375/115X+	JS115V-375WX	18.35	104	60.3	4-C8	8000	3050	1000
575	1000670	HPL-575/115V+	JS115V-575WC	18.35	104	60.3	4-C8	16520	3250	300
575	1000671	HPL-575/115X+	JS115V-575WX	18.35	104	60.3	4-C8	12360	3000	2000
750	1000675	HPL-750/115V+	JS115V-750WC	18.35	104	60.3	4-C8	21900	3250	300
750	1003153	HPL-750/115X+	JS115V-750WX	18.35	104	60.3	4-C8	16400	3050	1500
<b>120 Volt</b>										
575	1000672	HPL-575/120V+	JS120V-575WC	18.35	104	60.3	4-C8	16520	3250	300
575	1002283	HPL-575/120X+	JS120V575WX	18.35	104	60.3	4-C8	12360	3050	2000
750	1003144	HPL-750/120V+	JS120V-750WC	18.35	104	60.3	4-C8	21900	3250	300
750	1003178	HPL-750/120X+	JS120V-750WX	18.35	104	60.3	4-C8	16400	3050	1500
<b>230 Volt</b>										
375	1003182	HPL-375/230X+	JS230V-375WXN	18.35	104	60.3	6-C8	7250	3000	1000
575	1000673	HPL-575/230V+	JS230V-575WCN	18.35	104	60.3	6-C8	14900	3200	400
575	1002233	HPL-575/230X+	JS230V-575WXN	18.35	104	60.3	6-C8	11780	3050	1500
750	1002289	HPL-750/230V+	JS230V-750WCN	18.35	104	60.3	6-C8	19750	3200	300
750	1003179	HPL-750/230X+	JS230V-750WXN	18.35	104	60.3	6-C8	15600	3050	1500
<b>240 Volt</b>										
375	1003183	HPL-375/240X+	JS240V-375WXN	18.35	104	60.3	6-C8	7250	3000	1000
575	1000674	HPL-575/240V+	JS240V-575WCN	18.35	104	60.3	6-C8	14900	3050	400
575	1002234	HPL-575/240X+	JS240V-575WXN	18.35	104	60.3	6-C8	11780	3050	1500
750	1003184	HPL-750/240V+	JS240V-750WCN	18.35	104	60.3	6-C8	19750	3200	300
750	1003180	HPL-750/240X+	JS240V-750WXN	18.35	104	60.3	6-C8	15600	3050	1500

Top View

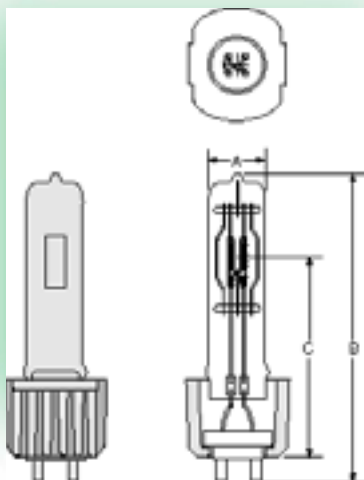

“Licensed under U.S. Patent #RE36316 claims 9-12 and 16-17 only; Canadian Patent #2,103,358; European Patent #592589 & #969496. No other licenses expressed or implied.”

