


**DIMENSIONS AND DATA**

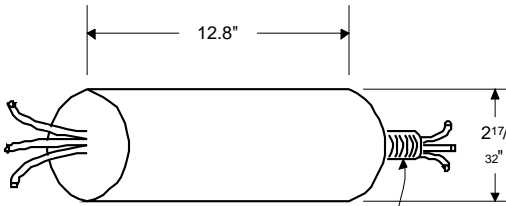

MAX. CASE TEMP 90°C

NIPPLE 1/2" NPT-14

**POSTLINE UNIT DIMENSIONS**

INPUT VOLTS		120			
CIRCUIT TYPE	HX-PFC				
POWER FACTOR (min)	83%				
REGULATION					
Line Volts	±5%				
Lamp Watts	±10%				
LINE CURRENT (Amps)					
Operating.....		0.65			
Open Circuit.....		1.05			
Starting.....		1.00			
UL TEMPERATURE RATINGS	H(180°C)				
Insulation Class	1029				
Coil Temperature Code	-40°F or -40°C	A			
MIN. AMBIENT STARTING TEMP.	260				
NOM. OPEN CIRCUIT VOLTAGE					
INPUT VOLTAGE AT LAMP DROPOUT.....		80			
INPUT WATTS					
RECOMMENDED FUSE (Amps).....		3			
CORE and COIL					
Dimension (A)					
Dimension (B)	6				
Weight (lbs.)					
Lead Lengths					
CAPACITOR REQUIREMENT					
Microfarads					
Volts (min.)					
Fault Current Withstand (amps)					
60 Hz TEST PROCEDURES (Refer to Philips Lighting Electronics N.A. TEST Procedure for HID Ballasts - Form					
High Potential Test (Volts)	2000				
1 minute	230-290				
2 seconds					
Open Circuit Voltage Test (Volts)	0.70-0.90				
Short-Circuit Current Test (Amps)					
Secondary Current					
Input Current.....		0.65	-	-	-
		1.00			


Capacitor:

The capacitor is included as part of the potted assembly.

Ignitor: IN CAN

The ignitor is included as part of the potted assembly.

Ballast to Lamp Distance (BTL) = 20 feet  
Temp Rating: 90°C

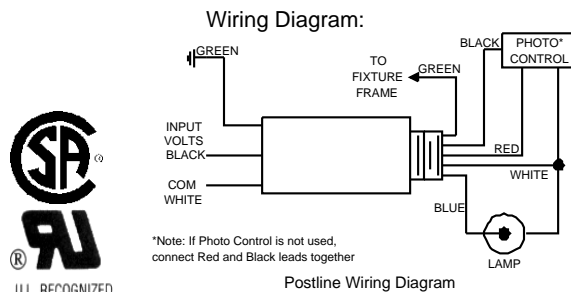

**Typical Ordering Information**

(please call Philips Lighting Electronics N.A. for suffix availability)

Order Suffix	Description
011P	Thermally protected Ballast with kit

Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

**PHILIPS LIGHTING ELECTRONICS N.A.**

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

Revised: 07/07/98