

LED PRIORI PLUS

The **LED PRIORI PLUS** is a new high performance under cabinet light with three different installation options and two ways to link multiple fixtures together. See page 20 for details. It measures only 15/16" high by 3-3/4" wide and is offered in four convenient lengths (8", 16", 24" and 32") and two popular finishes (Dark Bronze and White). Long life LEDs (35,000 hours rated life) with an embedded driver eliminate any additional components that typically have a shorter life span (20,000 hours or less).




*Energy Star Certified in 16", 24" and 32" lengths



Dark Bronze



White

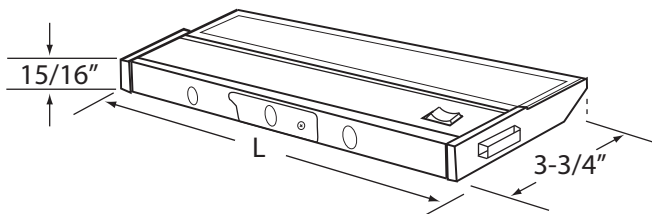

KITCHEN COUNTERS COMPUTER DESKS
RETAIL ENVIRONMENTS DISPLAY CASES MEDICAL FACILITIES
WORKSTATIONS ENTERTAINMENT CENTERS

FEATURES

- Bright LED light that is dimmable with most standard incandescent dimmers!
- Long life LEDs (35,000 hours rated life) with embedded driver eliminate the need for a built-in driver or additional components that typically have a shorter life span (20,000 hours or less)
- 3200°K \pm 300°K LEDs with a color rendering index over 87 deliver bright white light that mimics halogen – but without the heat!
- Linkable design allows quick and easy interconnection with jumpers (sold separately) or directly end-to-end
- Low profile – only 15/16"
- Lens cover wraps around front of housing to prevent light leaks
- Available in four convenient lengths with standard cabinet frame sizes in mind
- Available in Dark Bronze (shown) and White
- Wiring door/access plate allows for easier installation

FIXTURE

043L

PRIORI
PLUS LED
fixtures

8 = 8-1/2" length , 9 watts
16* = 16-1/2" length, 8.7 watts
24* = 24-1/2" length, 13.1 watts
32* = 32-1/2" length, 17.7 watts

*Energy Star Certified

DB = Dark Bronze
WH = White

Note: LED PRIORI PLUS fixtures have 3/8" knockouts every 4" along the back and the top of the housing. Power cords, junction boxes and jumpers are sold separately.

INSTALLATION EXAMPLE



The LED PRIORI PLUS can be made up without opening the fixture and its wiring compartment. Open the access panel at the rear of the fixture, pull the wires out, make up the connections using the quick stab connectors and replace the door. Each fixture is packaged with a 3/8" wire clamp fitting and easy-to-use stab connectors for quick direct wire assembly.

ACCESSORIES

043J-BR, 043J-WH

Hardwire junction box for PRIORI fixtures, BRonze or WHite
7-3/8" L x 2-1/8" W x 1" H; includes 12" extension and two 3/8" cable connectors, c/UL/us Listed



043A-(LENGTH)-EX-WH

White linking cables (jumpers) for connecting multiple PRIORI fixtures; available in 6", 12", 24" and 36" lengths; c/UL/us Listed



043A-PC6-BK, 043A-PC6-WH

Six foot power cord for PRIORI fixtures, 120V AC grounded plug and 3-wire grounded moxex connector, Black or WHite, c/UL/us



043A-(LENGTH)-EX-BK

Black linking cables (jumpers) for connecting multiple PRIORI fixtures; available in 6", 12", 24" and 36" lengths; c/UL/us Listed



TECHNICAL SPECIFICATIONS

| | |
|--------------|---|
| Voltage | 120V, 60Hz AC operation |
| Construction | Cold rolled steel housing with plastic end caps and plastic ventilation spacers for heat dissipation |
| Mounting | Mount to underside of shelf or cabinet, at leading edge for best performance; see also page 20. |
| Dimensions | H = 15/16", W = 3-3/4", available Lengths = 8-1/2", 16-1/2", 24-1/2", 32-1/2" |
| Switching | On/Off rocker switch |
| Knockouts | 3/8" knockouts standard: every 4" along the back and every 4" along top of housing; middle knockout on back of housing has access panel for quick make-up for hardwire installation without entering wiring compartment. Another hardwire option is to use hardwire junction box (043J-WH or -BR, sold separately) which include four 3/8" knockouts, two reducers/wire clamps, 'stab' connectors and a 12" extension to bring power to a fixture mounted at the front of the cabinet |
| Wattages | 043L-8 = 9 watts, 043L-16 size = 8.7 watts, 043L-24 size = 13.1 watts, 043L-32 size = 17.7 watts |
| Power cord | Six-foot power cord (043A-PC6, sold separately) for use with "Cord and Plug Installation" shown on page 20 |
| Maximum run | 600 watts |
| Packaging | Retail box |
| LED specs | Seoul semiconductor LEDs, 35,000 hour rated life, 87CRI, 3200°K ± 300°K, 20mA, 55V, 134° beam angle |
| Dimmers | Dimmable with most standard incandescent dimmers |
| Diffuser | Full length tempered prismatic glass lens; hinged lens with magnetic closure |

www.americanlighting.com