

# Integral Tube

# LED

## LED 4' Linear Tube 4000k

### Specifications



The ETi 18 watt 1850 lumen LED 4' tubes offers exceptional performance for precision lighting applications, while reducing energy and maintenance cost when compared with conventional light sources. These 4' linear LED tubes are high quality replacements for fluorescent lamps and are available in 4000K & 3500K. They are UL listed for use in damp locations and are RoHS compliant with no lead or mercury. Non-dimmable. Warranty period 5 years or 60 months.

### KEY FEATURES & BENEFITS


- 18 watt Low Power and High Performance
- 1850lms Linear Tube
- 4000K
- UL E349551 - Luminaire conversion kit
- UL E339058 - Component for new fixtures
- Rated Lifetime: 50,000 hours
- Easy, fast & safe installation



This light source meets restrictions on hazardous substances.

wire to one endcap

### LAMP DIMENSIONS



SKU# 54104441

Dimension A = 1.2"

Dimension B = 47.2"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.etiled.us

### APPLICATION INFORMATION

Typical applications for the LED four foot tubes include retrofitting existing fluorescent fixtures. Includes; homes, museums, galleries, shop windows, restaurants, meeting rooms and hotel/motel locations.



# LED 4' Tube 4000k

# LED

## SPECIFICATION DATA

Project \_\_\_\_\_

Item Number \_\_\_\_\_



Prepared by \_\_\_\_\_ Date \_\_\_\_\_

## ORDERING INFORMATION

Description	Wattage	Base Type	Input Voltage (VAC)	Average Rated Life <sup>1</sup>	Typical Lumens <sup>2</sup>	CCT <sup>3</sup>	CRI <sup>4</sup>	R9	Power Factor	DUV	90-270° Beam Angle	0-180° Spacing	90-270° Spacing
LED18w4ft8tube 840NDIM	18	G13	120-277V	50,000	1,850	4000k	83	27.7	≥0.9	.0008	120	1.24	1.26
<sup>1</sup> Hours lifetime with 70% lumen maintenance													
<sup>2</sup> Thermally stable typical lumens (±10%)													
<sup>3</sup> Thermally stable CCT (±10%)													
<sup>4</sup> Color rendering index													

## SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54104441	8366070	1.4" x 49.5" x 1.4"	1.1	N/A	N/A	N/A	N/A	15	50836607007709	8.3" x 50.3" x 5.0"	18.1

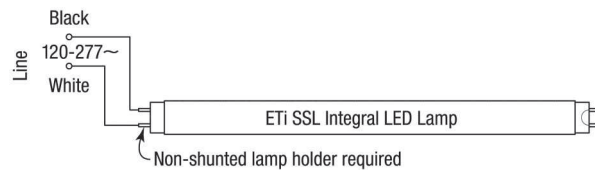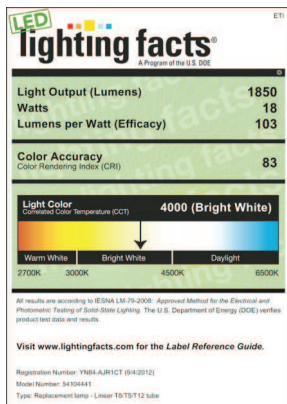

**The Americas Headquarters**  
**26650 Renaissance Parkway, STE 6**  
**Cleveland, OH 44128**

**855-384-7754**    **www.etiled.us**