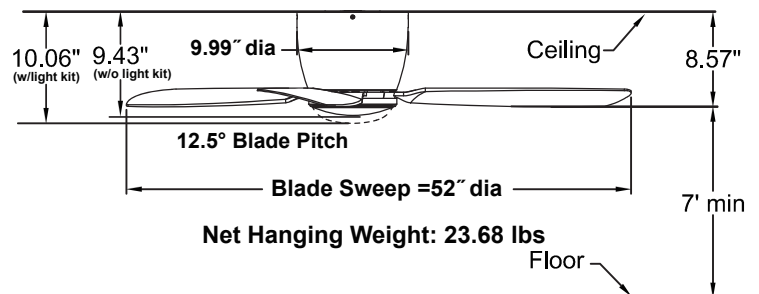
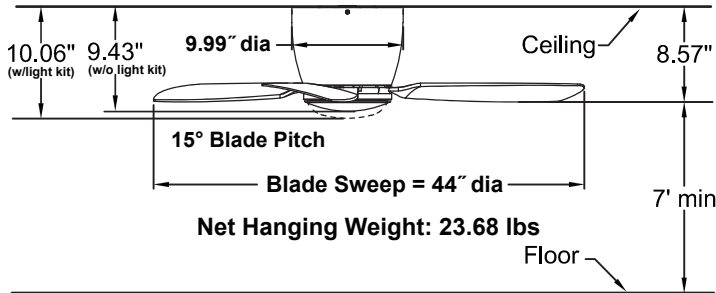


EMBRACE™**FPS7967**
Ceiling Fan****INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 17 motor is designed for optimal performance with this fan.

BLADE SET:

A set of three 19" reversible composite blades is included for 44" fan.

A set of three 23" reversible composite blades is included for 52" fan.

CONTROL OPTIONS:

TR20WH hand-held remote control with wall mount is included. Optional C21 wall control is available. Push button remote control has 3 fan speeds, infinite light levels, reverse and off button. Instructions are provided with each control.

LIGHTING OPTIONS:

One bulb (100-watt halogen minican bulb -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

LOCATION USE:

Fan is rated for dry location only.

Available Finishes

| | |
|----|--|
| OB | Oil-rubbed Bronze with Oil-rubbed Bronze blades and Opal Frosted Glass / Steel Cap |
| BN | Brushed Nickel with Brushed Nickel blades and Opal Frosted Glass / Steel Cap |
| MW | Matte White with Matte White blades and Opal Frosted Glass / Steel Cap |

44" Fan Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 188 | 4238 | 88 | 0.41 | 48 |
| Med | 146 | 3207 | 100 | 0.42 | 32 |
| Low | 64 | 1316 | 146 | 0.26 | 9 |

52" Fan Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 160 | 5509 | 115 | 0.42 | 48 |
| Med | 126 | 3844 | 120 | 0.43 | 32 |
| Low | 58 | 2063 | 229 | 0.23 | 9 |