



GE  
Lighting

**12273 - EL23/R25/WW**

GE Genura® R25 - Facilities; Retail Display; Hospitality; Office; Restaurant

Photo  
Not Available

Rendering

High Color

Photo  
Not Available

Savings

Energy

Photo  
Not Available

UL Listed

**GENERAL CHARACTERISTICS**

Lamp Type	Compact Fluorescent - Self-Ballasted
Bulb	R25
Base	Medium Screw (E26)
Equivalent Wattage	65.0 W
Rated Life	15000.0 hrs
Starting Temperature (MIN)	0.0 °C
Total Harmonic Distortion (THD)	130.0 %
LEED-EB MR Credit	227 picograms Hg per mean lumen hour
Primary Application	Indoor Floodlight;Facilities;Retail Display;Hospitality;Office;Restaurant

**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens	1100.0
Mean Lumens	880.0
Nominal Initial Lumens per Watt	47
Color Temperature	3000.0 K
Color Rendering Index (CRI)	82.0

**ELECTRICAL CHARACTERISTICS**


Wattage	23.0
Voltage	120.0
Input Voltage	120.0 V
Input Current	0.3700 A
Power Factor	0.6

**DIMENSIONS**

Maximum Overall Length (MOL)	4.9000 in(124.5 mm)
Nominal Length	4.900 in(124.5 mm)
Bulb Diameter (DIA)	3.125 in(79.4 mm)

**PRODUCT INFORMATION**

Product Code	12273
Description	EL23/R25/WW
Standard Package	Case
Standard Package GTIN	10043168122730
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168122733

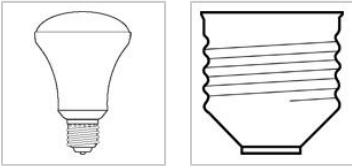

## CAUTIONS & WARNINGS

### Caution

- Lamp may shatter and cause injury if broken
  - Remove and install by grasping only plastic portion of the lamp.

### Warning

- Risk of Electric Shock
  - Do not open - no user serviceable parts inside.
  - Do not use where directly exposed to water.

## NOTES

- Best performance if operated base up and at 77 degrees F (25C) ambient temperature.
- Fluorescent lamp lumens decline during life
- Lumens on one piece self ballasted lamp systems are measured base up.
- Use only on 120V 60 Hz circuits. Do not use on dimming circuits, photocells or timers. Do not use in wet locations.