Product Bulletin for AFCI Receptacles



Introducing the SmartlockPro® Outlet Branch Circuit AFCI Receptacle

Advanced technology helps protect against electrical fires resulting from arc-faults.


The U.S. Fire Administration (USFA) National Fire Incident Reporting System estimates that between 2006 and 2010 there were an average of approximately 28,000 electrical residential building fires, causing nearly 300 deaths per year as well as average property damage of almost \$1 billion annually. According to the National Fire Protection Association (NFPA), arc-faults are "the principle electrical failure mode resulting in fire."

Arc Fault Circuit Interrupters (AFCI) were developed to help combat the problems associated with arc-faults. AFCI's are devices designed to detect a wide range of arc-faults to help reduce the likelihood of the electrical system being an ignition source of a fire. They function by de-energizing the circuit downstream of the device upon which an arc-fault is detected; ideally preventing ignition and a resultant fire. AFCIs are now required by the National Electrical Code in many areas throughout the home.

Whole house electrical safety is a tall order, but with the new SmartlockPro Outlet Branch Circuit (OBC) AFCI Receptacle Leviton has developed a device to offer added protection from arc-faults. Often unseen, arc-faults can occur anywhere in the home's electrical system including within walls, at loose electrical connections or within electrical cords accidently damaged by impinging furniture. Leviton OBC AFCI Receptacles are designed to identify arc-faults and respond by interrupting power to help prevent arc-faults that may lead to a fire.

To date, the only available option for providing the required AFCI protection against electrical fire hazards was through the use of AFCI breakers. And, even though there were some exceptions to the Code that would allow for the use of an AFCI receptacle with prescribed wiring techniques, there were no AFCI receptacles available on the market. That has recently changed.

Leviton's OBC AFCI Receptacle addresses the dangers associated with both types of potentially hazardous arcing – parallel and series arcing. Similar to GFCIs, AFCI receptacles provide feed-through protection and are able to detect downstream arc-faults, both parallel and series, as well as upstream series arc-faults. Utilizing an AFCI receptacle offers homeowners the benefit of localized TEST and RESET, providing a convenient alternative to AFCI breakers.

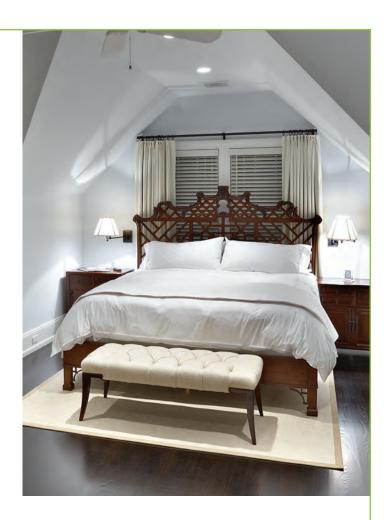



National Electrical Code

The 2011 National Electrical Code® (NEC) (210.12) addresses the use of AFCIs in residences:

"Dwelling Units. (A) Where required. All 15A or 20A, 120V branch circuits in dwelling units supplying outlets in family rooms, dining rooms, living rooms, parlors, libraries, dens, bedrooms, sunrooms, recreation rooms, closets, hallways, or similar rooms or areas must be protected by a listed AFCI device of the combination type.

Exception 1: AFCI protection can be of the branch-circuit type located at the first outlet if the circuit conductors are installed in RMC, IMC, EMT or Type MC or steel armored Type AC cable meeting requirements of 250.118, and the AFCI device is contained in a metal outlet or junction box.

Exception 2: Where a listed metal or nonmetallic conduit or tubing is encased in not less than 2 in. of concrete for the portion of the branch circuit between the branch-circuit overcurrent device and the first outlet, an outlet branch-circuit AFCI at the first outlet is permitted to provide protection for the remaining portion of the branch circuit.

- (B) Branch-Circuit Extensions or Modifications Dwelling Units. Where branch-circuit wiring is modified, replaced, or extended in any of the areas specified in 210.12(A), the branch circuit must be protected by:
 - (1) A listed combination AFCI located at the origin of the branch circuit; or
 - (2) A listed outlet branch circuit AFCI located at the first receptacle outlet of the existing branch circuit."

In accordance with the cited exceptions, Leviton's SmartlockPro OBC AFCI Receptacles can be used to meet the requirements of the Code.


Leviton's SmartlockPro OBC AFCI receptacle can also be used to meet the NEC requirements for replacement receptacles that take effect in 2014.


NEC 406.4(D) states, "Arc-Fault Circuit-Interrupter Protection. Effective January 1, 2014, where a receptacle outlet is supplied by a branch circuit that requires arc-fault circuit interrupter protection [210.12(A)], a replacement receptacle at this outlet must be one of the following:

- (1) A listed outlet branch circuit type arc-fault circuit interrupter receptacle
- (2) A receptacle protected by a listed outlet branch circuit type arc-fault circuit interrupter type receptacle
- (3) A receptacle protected by a listed combination type arc-fault circuit interrupter type circuit breaker."

Meeting all of the requirements for an outlet branchcircuit type AFCI, Leviton's new OBC AFCI Receptacle provides protection to both branch circuit wiring as well as extensions to branches such as appliances and cord sets.

Dimensional Drawings

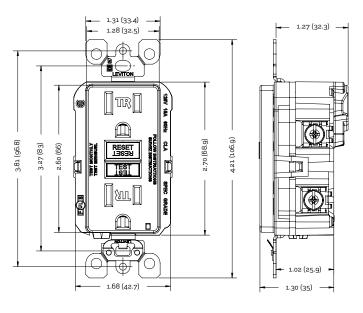

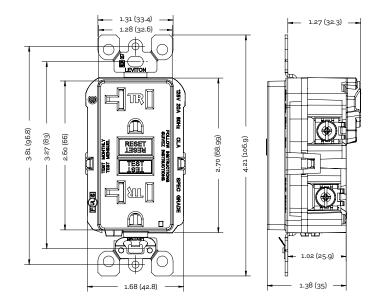

15 AMP 20 AMP

Features and Benefits

General

- Use of TEST and RESET buttons is similar to traditional GFCI receptacles of which consumers have become familiar with. This translates into greater acceptance of the technology and a more user-friendly platform
- Meets or exceeds UL requirements for tripping time on both series and parallel arcs
- Device design reduces nuisance tripping
- Impact-resistant thermoplastic cover and body
- Superior resistance to electrical surges and over-voltages
- Expanded wiring options with nine back-wire holes (two for each line and load connection plus one for ground with an internal clamp)
- Silver alloy contacts
- Compatible with all Decora® devices and wallplates; available in select colors
- Packed with coordinating wallplate
- Backed by Leviton's Limited Two-Year Warranty

Tamper-Resistant

- TR symbol indicates the device's compliance with the latest NEC® requirements for tamper-resistant receptacles in residences and childcare facilities

Lockout Action

- Automatically tests the AFCI every time the RESET button is depressed; the AFCI will not reset if the AFCI circuit is not functioning properly
- By blocking reset of the AFCI if protection has been compromised, the SmartlockPro OBC AFCI reduces the possibility of end-users incorrectly assuming that a reset AFCI is providing protection when its functionality has been compromised
- A line-load reversal diagnostic feature is provided which prevents the AFCI from being reset and stops power from being fed to the AFCI receptacle face or through to downstream devices; a green LED indicator on the AFCI's face also illuminates to alert the installer to a line-load wiring reversal when the device is in the tripped state
- The trip latching mechanism in the SmartlockPro OBC AFCI is a one-piece "T" design for efficient operation
- There are 4 sets of contacts for load terminals and face; the SmartlockPro OBC AFCI uses a patented bifurcated bridge contact for efficient operation

Agency Standards

- Leviton AFCI UL file E342815
- Meets UL Standard 1699A (Arc-Fault Circuit-Interrupters, Outlet Branch Circuit Type) for AFCI
- Meets UL Standard 498 for receptacle
- Requirements in UL1998 and UL1699 were applied based on reference in UL1699A

Ordering Information:

SmartlockPro Consumer Product Safety Commission Outlet Branch Circuit AFCI Receptacles

Description	Rating	Cat. No.	Color
Tamper-Resistant Outlet Branch Circuit AFCI Receptacle with LED Indicator	15A-120V @ Receptacle, 20A-125V Feed-Through NEMA 5-15R	AFTR1-W AFTR1-I AFTR1-T AFTR1-GY AFTR1-E AFTR1	White Ivory Light Almond Gray Black Brown
Tamper-Resistant Outlet Branch Circuit AFCI Receptacle with LED Indicator	20A-120V @ Receptacle, 20A-125V Feed-Through NEMA 5-20R	AFTR2-W AFTR2-I AFTR2-T AFTR2-GY AFTR2-E AFTR2	White Ivory Light Almond Gray Black Brown

Leviton Manufacturing Co., Inc. World Headquarters

201 North Service Road, Melville, NY 11747-3138
Telephone: 1-800-323-8920 FAX: 1-800-832-9538
Tech Line (8:30AM-7:00PM E.T. Monday-Friday): 1-800-824-3005



