

# xPAR-30S™

Fixed Wattage, Ultra-Light

**ADVANCED**



xPAR-30S



## PRODUCT SUMMARY

- Fixed Wattage, Dimmable
- Multiple Color Temperatures Available
- Custom Optics
- High Efficacy
- Proprietary Crimpfin Heatsink Design
- 50,000 hour life, 5 year warranty
- Halogen PAR form factor (ANSI compliant)
- No UV or IR radiation
- Voltage: 120VAC
- 0.9 Power Factor
- Socket Type: Medium Screw Base
- Environment: Dry
- Length: 3.6 in, 92 mm
- Diameter: 3.75 in, 95 mm
- Weight: 7.05 ounces, 200 g

\* Note: Subject to change

The high power xPAR30S™ lamps from MSi are 13W fixed LED replacement bulbs, exceeds the light output of a 75-watt incandescent PAR lamp. This amazing lamp brings together the latest innovation and experience from MSi's multiple engineering disciplines to deliver the complete solution for retail, hospitality, furniture, museum and commercial applications.

120~

DIMMABLE

MEDIUM

2700K

3000K

4000K

15°

25°

UV



Catalog #	Power	CCT (K)	CRI	Beam Angle	Lumens	CBCP
xPAR30S271513T1D	13W	2700	82	15°	760	8,360
xPAR30S272513T1D				25°		3,268
xPAR30S301513T1D	13W	3000	82	15°	820	9,000
xPAR30S302513T1D				25°		3,525
xPAR30S401513T1D	13W	4000	82	15°	880	9,680
xPAR30S402513T1D				25°		3,784

1342 South Powerline Road, Deerfield Beach, FL 33442

Toll Free 888.778.9864 | Fax Orders to: 954-971-3725 | info@msissl.com | www.msissl.com

# xPAR-30S™



## CANDELA DISTRIBUTION

## BEAM DISTRIBUTION

## 0° AIMING FOOTCANDLES

15°



3000K

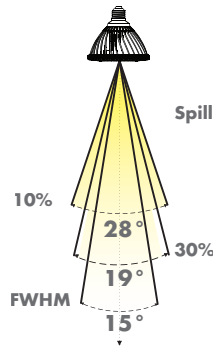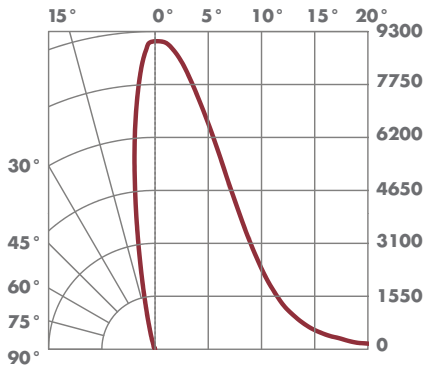

Distance To Floor	Beam Diameter (50% CBCP)	Footcandles On Floor
5'	1.3'	360
10'	2.6'	90
15'	3.9'	40
20'	5.3'	23

25°

3000K

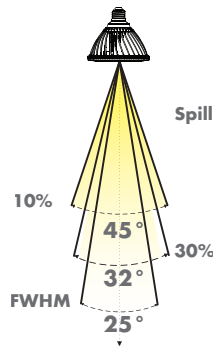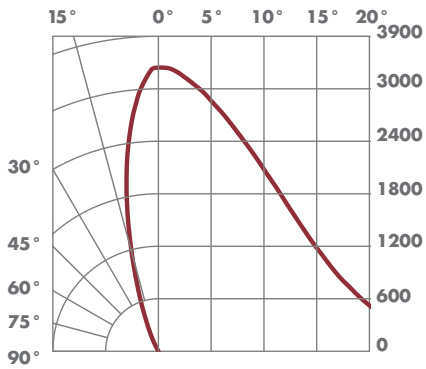

Distance To Floor	Beam Diameter (50% CBCP)	Footcandles On Floor
5'	2.2'	141
10'	4.4'	35
15'	6.7'	16
20'	8.9'	9

**CAUTION:** Risk of electric shock. Do not open - no user serviceable parts inside. Use in dry locations only. Turn power off before inspection, installation, or removal. Not intended for use with emergency exit fixtures or emergency exit lights. Not for use where exposed to the weather.

**WARRANTY** - This product is covered by a 5 year limited warranty under normal operating conditions based on 12 hours of usage per day. For details please visit [www.msissl.com/warranty.html](http://www.msissl.com/warranty.html)