Updated 2.13.13

xPAR™-30S

Fixed Wattage, Ultra-Light NON-DIMMABLE

MSi Solid State Lighting

xPAR-30S

120~

220~

MEDIUM

2700K

3000K

4000K

15°

25°

UV

- Fixed Wattage
- Non-Dimmable
- Multiple Color Temperatures Available
- Custom Optics
- Proprietary Crimpfin Heatsink Design
- 50,000 hour life, 5 year warranty
- Halogen PAR form factor (ANSI compliant)
- No UV or IR radiation
- Voltage: 120v - 220v
- 0.9 Power Factor
- Socket Type: Medium Screw Base
- Environment: Dry
- Length: 3.6 in, 92 mm
- Diameter: 3.75 in, 95 mm
- Weight: 7.05 ounces, 200 g

* Note: Subject to change

The high power xPAR30S lamps from MSi are 12W fixed LED replacement bulbs, exceeds the light output of a 75-watt incandescent PAR lamp. This amazing lamp brings together the latest innovation and experience from MSi's multiple engineering disciplines to deliver the complete solution for retail, hospitality, furniture, museum and commercial applications.

CREE LEDs | lighting facts | cULus LISTED | RoHS | FC

Catalog #	Power	CCT (K)	CRI	Beam Angle	Lumens	CBCP
xPAR30S271512T3N	12W	2700	82	15°	800	8,360
xPAR30S272512T3N				25°		3,610
xPAR30S301512T3N	12W	3000	82	15°	850	9,000
xPAR30S302512T3N				25°		3,943
xPAR30S401512T3N	12W	4000	82	15°	880	9,680
xPAR30S402512T3N				25°		3,784

ENERGY STAR PARTNER

1342 South Powerline Road, Deerfield Beach, FL 33442

Toll Free 888.778.9864 | Fax Orders to: 954-971-3725 | info@msissl.com | www.msissl.com

xPAR™-30S

CANDELA DISTRIBUTION

BEAM DISTRIBUTION

0° AIMING FOOTCANDLES

15°

3000K

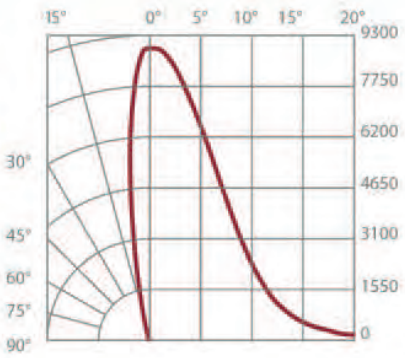



Distance To Floor	Beam Diameter (50% CBCP)	Footcandles On Floor
5′	1.3′	360
10′	2.6′	90
15′	3.9′	40
20′	5.3′	23

25°

3000K

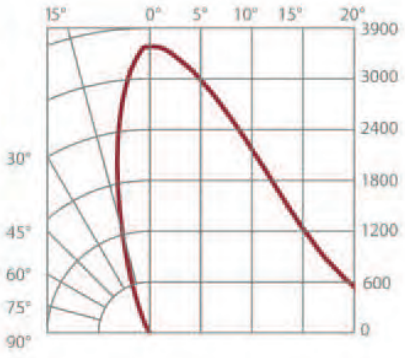



Distance To Floor	Beam Diameter (50% CBCP)	Footcandles On Floor
5′	2.2′	141
10′	4.4′	35
15′	6.7′	16
20′	8.9′	9

CAUTION: Risk of electric shock. Do not open - no user serviceable parts inside. Use in dry locations only. Turn power off before inspection, installation, or removal. Not intended for use with emergency exit fixtures or emergency exit lights.
Not for use where exposed to the weather.

WARRANTY - This product is covered by a 5 year limited warranty under normal operating conditions based on 12 hours of usage per day. For details please visit www.msissl.com/warranty.html