


CFL-R40™ & CFL-R30™ ELECTRONIC FLOODLIGHT

New! Product Information Bulletin GU-24 TYPE

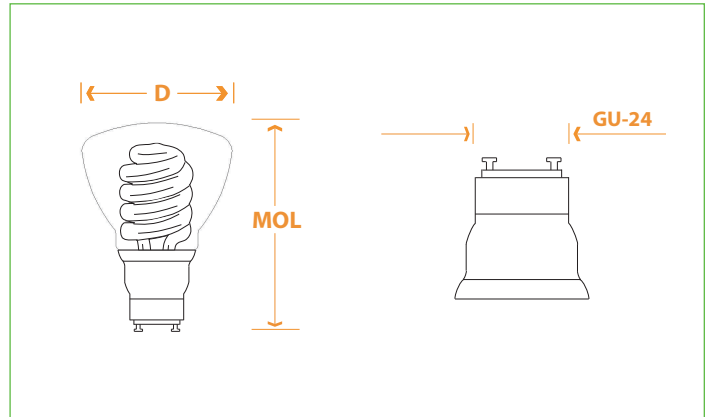

Technical Data

CFL-R40™ & CFL-R30™ Electronic, NPF, GU-24 Base, 120VAC- 50/60Hz, 10,000 Hours Average Life											Incandescent Equivalent		
Item Number	Watts	Input Line Current	Power Factor	THD	M.O.L. (Inch)	(D) Diameter (Inch)	Color Temp. (°K)	CRI	Lumens	Lm/W	Watts	Lumens	Lm/W
34019-GU*	19	0.310 A	>0.50	<150%	5.250	4.625	2850	>82	950	50	x	x	x
34016-GU	16	0.260 A	>0.50	<150%	5.250	4.625	2850	>82	750	47	65	730	11
33016-GU*	16	0.260 A	>0.50	<150%	5.125	3.625	2850	>82	750	47	65	725	11
33014-GU	14	0.230 A	>0.50	<150%	5.125	3.625	2850	>82	650	46	45	485	11

APPLICATION INFORMATION: TO BE USED WITH TRACK LIGHTS • RECESSED CANS • WARDROBE CLOSETS • DRIVEWAYS • WALKWAYS • YARDS & GARDENS OPEN & TOTALLY ENCLOSED FIXTURES • USE WITH OCCUPANCY SENSORS MADE BY NEPTUN • AND MORE

E 26 / GU-24 ADAPTERS

Item Number	Description	Watts MAX.	Voltage	Line Current MAX.	Colors Available	Type
E 26 / GU-24-PL	E 26 / GU-24 Adapter	600	600	1 A	White	Permanent Locking
E 26 / GU-24-NL	E 26 / GU-24 Adapter	600	600	1 A	White	Non-Locking

Features and Benefits

- * Saves up to 70% energy with comparable light output
- * Energy Star Certified for 10,000 hours (*)
- * Color Temperature of 2850°K: Matching incandescent R lamps
- * High Luminous Efficiency: Up to 50 Lm/W
- * Wide range of operation temperatures: 0°F - 120°F
- * New! Patented Amalgam Technology: Any working position with stable light output
- * Superior Lumen Maintenance of 85% after 4,000 Hours of use
- * Indoor or Outdoor



NEPTUN LIGHT, Inc.
service@neptunlight.com
Tel. 1-847-735-8330
Toll Free: 1-888-735-8330



© Copyright 2008 NEPTUN LIGHT, Inc.