


**NS-40 / NL-41
Stepped Baffle with Ring**

TRIM DIMENSIONS



Trim OD: 5"
Aperture: 3-1/2"
Height: 1-7/8"

FEATURES

Trim
Precision spun 0.040 aluminum baffle with deep grooves to reduce aperture glare. Non-reflective painted finishes. Separate trim ring available in plastic or metal, may also be used with custom combination of ring finishes.

Mounting
Trim includes three trim clips that securely mount trim in housing.

Compatible Housings
Compatible with Line Voltage and Compact Fluorescent housings. See individual specification sheets for more information.

Lamp
Line Voltage
50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)
Compact Fluorescent
13W Quad/Triple (NS-406Q; NS-406EL; NSR-408Q; NSR-408EL)






Labels and Listings
cULus Listed for Damp Location when used with compatible housing.

Stepped Baffle with Ring

- NS-40: White Stepped Baffle with White Metal Ring
- NS-40BZBZ: Bronze Stepped Baffle with Bronze Metal Ring
- NS-40C: White Stepped Baffle with Chrome Metal Ring
- NS-40CO: Copper Stepped Baffle with Copper Metal Ring
- NS-40G: White Stepped Baffle with Gold Metal Ring
- NS-40N: Natural Metal Stepped Baffle with Natural Metal Ring
- NS-40P: White Phenolic Stepped Baffle with White Plastic Ring
- NS-41: Black Stepped Baffle with White Metal Ring
- NS-41B: Black Stepped Baffle with Black Metal Ring
- NS-41C: Black Stepped Baffle with Chrome Metal Ring
- NS-41G: Black Stepped Baffle with Gold Metal Ring
- NS-41N: Black Stepped Baffle with Natural Metal Ring
- NS-41P: Black Phenolic Stepped Baffle with White Plastic Ring

Type
Project
Catalog No.
Lamp/Wattage

HOUSING DIMENSIONS

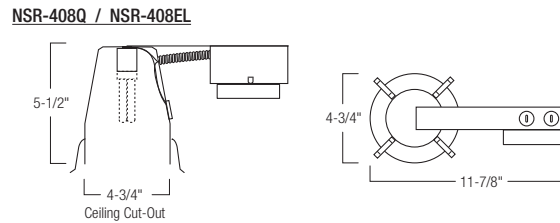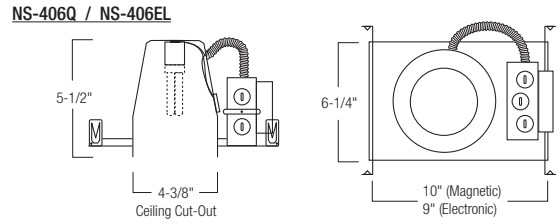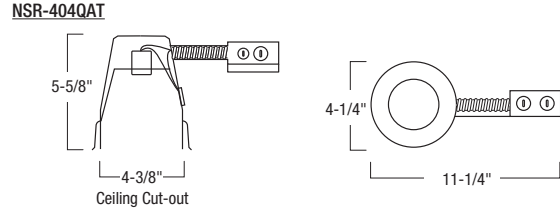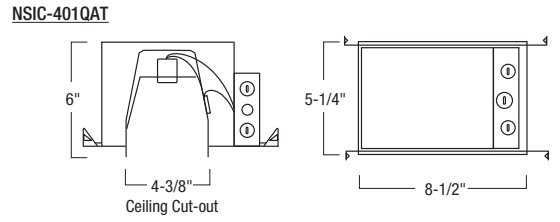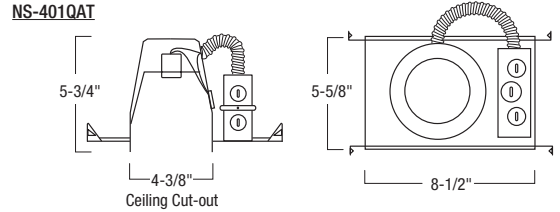

Compatible Housings

LINE VOLTAGE			
Item Number	Installation Type	Lamp	Dimensions
<input type="checkbox"/> NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
<input type="checkbox"/> NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
<input type="checkbox"/> NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"
COMPACT FLUORESCENT			
<input type="checkbox"/> NS-406Q	Non-IC New Constr., Magnetic	13W Quad	W: 6-1/4" L: 10" H: 5-1/2"
<input type="checkbox"/> NS-406EL	Non-IC New Constr., Electronic	13W Quad/Triple	W: 6-1/4" L: 9" H: 5-1/2"
<input type="checkbox"/> NSR-408Q	Non-IC Remodel, Magnetic	13W Quad	W: 4-3/4" L: 11-7/8" H: 5-1/2"
<input type="checkbox"/> NSR-408EL	Non-IC Remodel, Electronic	13W Quad/Triple	W: 4-3/4" L: 11-7/8" H: 5-1/2"