


**NT-5071
R20/PAR20 Eyeball with Metal Trim**

TRIM DIMENSIONS

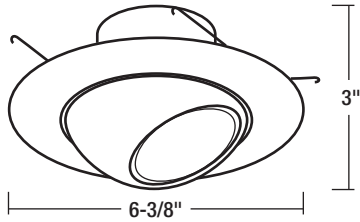

OD: 6-3/8"
Height: 3"

FEATURES

Trim
Adjustable metal trim can be rotated 358° horizontally and 30° vertically. Eyeball includes two socket positions for optimum light control and output.

Mounting
Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86).

Compatible Housings
Compatible with Line Voltage housings.
See individual specification sheets for more information.


Lamp
Line Voltage
50W R20/PAR20 Maximum (NH-501Q; NHIC-501QAT; NHR-504Q; NHRIC-504QAT)

Labels and Listings
cULus Listed for Damp Location when used with compatible housing.


Type _____
Project _____
Catalog No. _____
Lamp/Wattage _____

HOUSING DIMENSIONS

NH-501Q / NHIC-501QAT

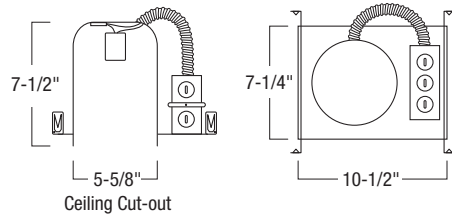

NHR-504Q / NHRIC-504QAT

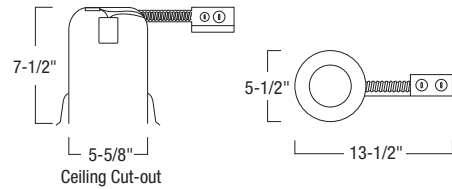

R/PAR20 Eyeball with Metal Trim

- NT-5071B: Black R/PAR20 Eyeball with Black Metal Trim
- NT-5071BZ: Bronze R/PAR20 Eyeball with Bronze Metal Trim
- NT-5071CO: Copper R/PAR20 Eyeball with Copper Metal Trim
- NT-5071N: Natural Metal R/PAR20 Eyeball with Natural Metal Trim
- NT-5071W: White R/PAR20 Eyeball with White Metal Trim

Compatible Housings

LINE VOLTAGE			
Item Number	Installation Type	Lamp	Dimensions
<input type="checkbox"/> NH-501Q	Non-IC New Construction	75W BR/PAR30	W: 7-1/4" L: 10-1/2" H: 7-1/2"
<input type="checkbox"/> NHIC-501QAT	IC Air-Tight New Construction	75W BR/PAR30	W: 7-1/4" L: 10-1/2" H: 7-1/2"
<input type="checkbox"/> NHR-504Q	Non-IC Remodel Housing	75W BR/PAR30	W: 5-1/2" L: 13-1/2" H: 7-1/2"
<input type="checkbox"/> NHRIC-504QAT	IC Air-Tight Remodel Housing	75W BR/PAR30	W: 5-1/2" L: 13-1/2" H: 7-1/2"