



MasterColor CDM-i 25W PAR38 SP/3K 1CT

Product family description
MasterColor® Integrated Ceramic Metal Halide
PAR38 Protected

Features/Benefits

- Mastercolor Technology
- Energy Saving - Up to 3x less energy consumption than standard PAR38 halogen lamps with comparable light output.
- Lasts up to to 3x longer than standard halogen PAR38
- Very good color rendering
- Crisp white light
- Integrated Electronic Ballast - Easy upgrade and instant retrofit from halogen PAR38
- Familiar PAR38 Shape and Size
- Simple 'twist in' for one step easy installation
- Easy maintenance
- 10,25, and 40 degree beam spread

Applications

- Ideal for general, ambient, or accent lighting.

Notes

- Rated average life is the life obtained, on the average, from large representative groups of lamps in laboratory tests under controlled conditions at 10 or more operating hours per start. It is based on survival of at least 50% of the lamps and allows for individual lamps or groups of lamps to vary considerably from the average.

Product data	
Product Number	144774
Full product name	MasterColor CDM-i 25W PAR38 SP/3K 1CT
Ordering Code	144774
Pack type	1 Lamp in a Folding Carton
Pieces per Sku	1
Skus/Case	6
Pack UPC	046677144777
EAN2US	
Case Bar Code	50046677144772

PHILIPS


Product data	
Successor Product number	
Base	Medium [Single Contact Medium Screw]
Bulb	PAR38 [PAR 4.75 inch/121mm]
Operating Position	Universal [Any or Universal (U)]
Packing Type	1CT [1 Lamp in a Folding Carton]
Packing Configuration	6
Ordering Code	CDM-I 25/PAR38/SP/3K
Pack UPC	046677144777
Case Bar Code	50046677144772
Watts	25W
Lamp Voltage	120 V
Dimmable	No
Beam Angle	10D
Approx. MBCP	26000 cd
Color Code	830 [CCT of 3000K]
Color Rendering Index	87 Ra8
Color Designation	Warm White
Color Description	830 Warm White
Color Temperature	3000 K
Initial Lumens	1275 Lm
Overall Length C	135 mm
Diameter D	124 mm
Special Note	SP/3K [Spot 3K]
Product Number	144774




CDM-i 25W Medium PAR38




Base Medium

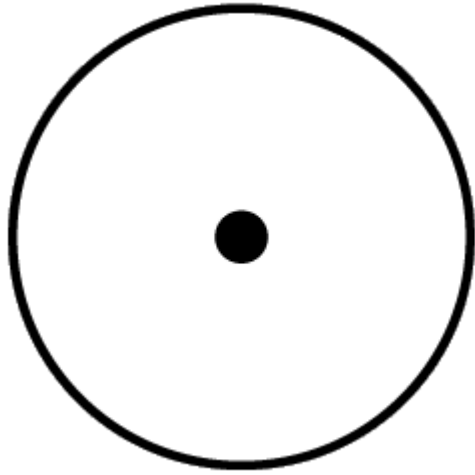


Operating Position Universal

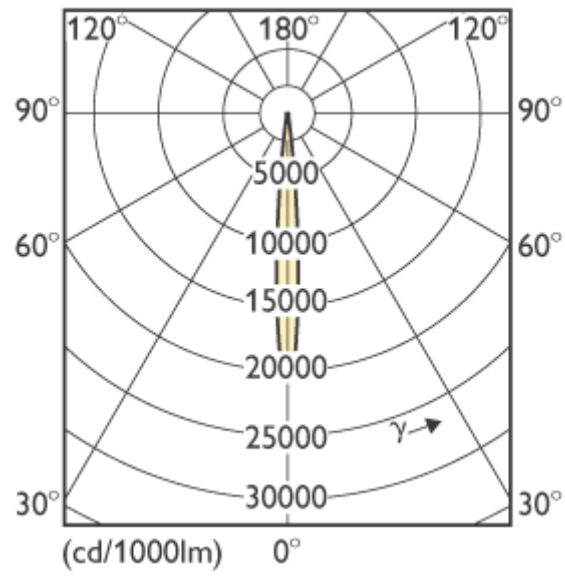


CDM-i 25W/830 10D

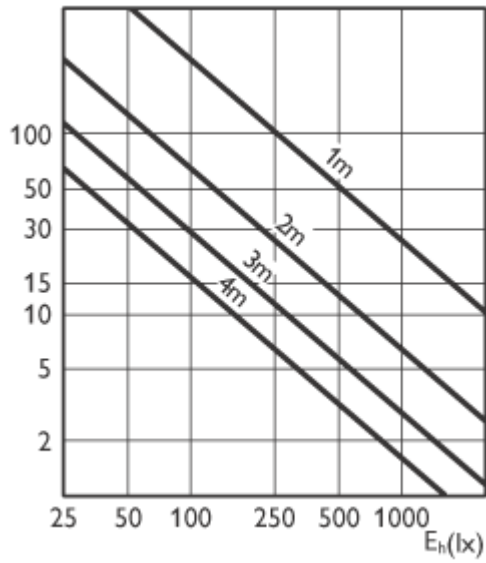


CDM-i 25W/830 10D

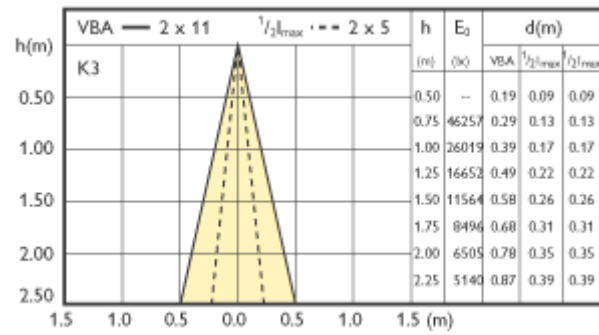

CDM-i 25W/830 10D

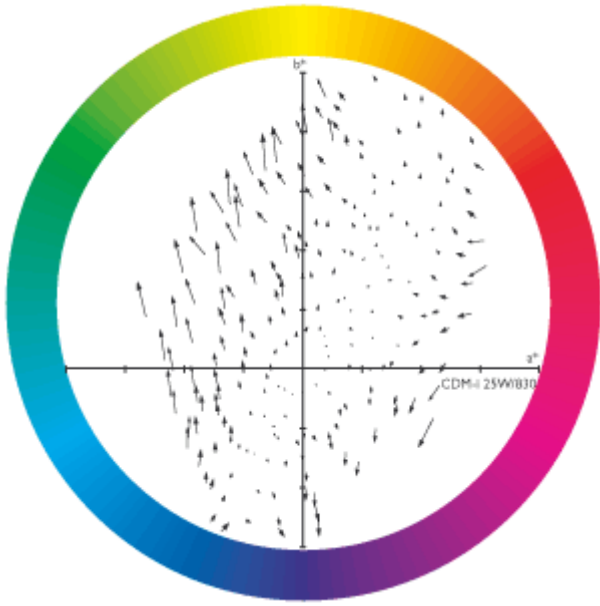

CDM-i 25W/830

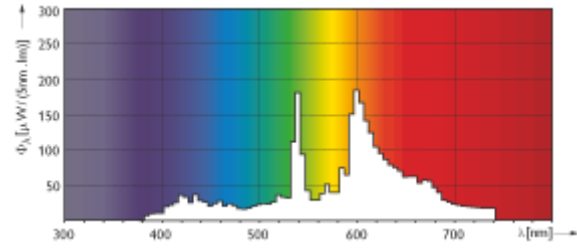

CDM-i 25W/830

