



MasterColor CDM 150W/ 940 Med ED17P CO ALTO+FB

Product family description

Range of protected, high-efficiency long life ceramic metal halide lamps with a stable color over lifetime and a crisp, sparkling light to be used in open fixtures.

Features

- Excellent Color Rendering.
- Superior Color Stability Over Life.
- Total Cost of Ownership Benefits.
- FadeBlock–Lamps feature integrated UV blocking medium for reduced fading of fabrics and paintings.
- Available in 50,70,100, and 150 watt with 3000&4000K color temperatures.

Benefits

- Environmentally Responsible TCLP* Compliant ALTO® Lamp Technology.
- High lamp efficacy (up to 95 LPW)
- Energy-efficient alternative to incandescent/halogen.
- * The TCLP is the US EPA's Toxicity Characteristic Leaching Procedure.

Application

- Ideal for general lighting, downlighting, and flood lighting.

Notes

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available."

PHILIPS

This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)

- Requires a ballast specified or approved for Philips Metal Halide lamp or one designed to the indicated ANSI standard. A pulse ignitor is required. Sockets and wiring must withstand starting pulse. (391)
- Supply Volts must be +/- 5% of rated ballast line volts for reactor type and +/- 10% for CWA or electronic ballasts. (392)
- UV filtered design (FadeBlock). (396)
- This product utilizes ALTO® Lamp Technology. ALTO products pass the US EPA's Toxicity Characteristic Leaching Procedure (TCLP) for non-hazardous waste status. (399)
- MasterColor® Metal Halide Lamps are not recommended for use on dimmers and are not warranted if used on dimmer systems. (401)
- Rated average life is the life obtained, on the average, from large representative groups of lamps in laboratory tests under controlled conditions at 10 or more operating hours per start. It is based on survival of at least 50% of the lamps and allows for individual lamps or groups of lamps to vary considerably from the average. For lamps with a rated average life of 24,000 hours, life is based on survival of 67% of the lamps. (351)
- Approximate lumen values listed are for vertical operation of the lamp. (352)
- Heat resisting glass bulb.

Footnotes

- Exclusive to Philips Lighting Company.

Product data	
Product Number	377267
Full product name	MasterColor CDM 150W/940 Med ED17P CO ALTO+FB
Ordering Code	MHC150/C/U/MP/4K ALTO
Pack type	1 Sleeve Open End
Pieces per Sku	1
Skus/Case	12
Pack UPC	046677377267
EAN2US	
Case Bar Code	50046677377262
Successor Product number	
Base	Medium [Single Contact Medium Screw]
Base Information	Brass [Brass Base]
Bulb	ED17P [Protected]
Bulb Material	Hard Glass
Bulb Finish	Coated



Product data	
Execution	Protected
Operating Position	Universal [Any or Universal (U)]
Packing Type	ISL [1 Sleeve Open End]
Packing Configuration	12
RatedAvgLife(See Family Notes)	20000 hr
Feature	ALTO® + FadeBlock™
Ordering Code	MHC150/C/U/MP/4K ALTO
Pack UPC	046677377267
Case Bar Code	50046677377262
ANSI Code HID	M142/M102/O
Watts	150W
Lamp Voltage	95 V
Mercury (Hg) Content	11.4 mg
Color Code	940 [CCT of 4000K]
Color Rendering Index	92 Ra8
Color Designation	Deluxe Cool White
Color Temperature	4000 K
Initial Lumens	11000 Lm
Design Mean Lumens	8250 Lm
Light Center Length L	3.438 in
Max Overall Length (MOL) - C	5.438 in
Diameter D	2.125 in
Product Number	377267




CDM ED17P CO




Base Medium

PHILIPS



CDM ED17P

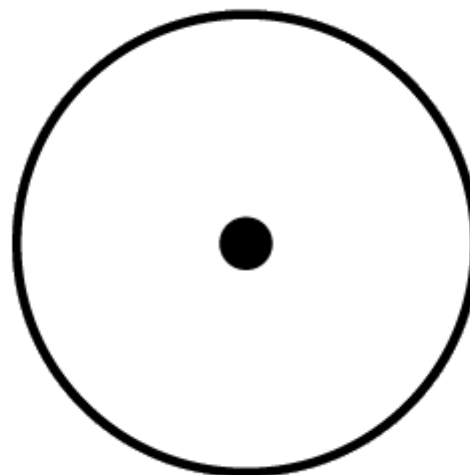

Operating Position Universal



©2009 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Document order number : 0000 000 00000