



## Switch Start MH Std 1000W Mog BT56 CL

Product family description  
Range of Switch Start quartz metal halide lamps for long life and high efficiency.

### Features/Benefits

- Long life - up to 20,000 hours.
- Up to 100 lumens per watt.

### Applications

- Ideal for industrial and retail high/low bays, and parking lots.

### Notes

- Color characteristics may vary somewhat from one lamp type to another. Time should be allowed for the lamp to stabilize in color when it is turned on for the first time or if for any reason its operating position is changed. This may require several hours' operation, with more than one start. Lamp color and output may change temporarily if the lamp is subjected to excess vibration or shock. Lamp color characteristics may change after long accumulate operating time. (372)
- Rated average life is the life obtained, on the average, from large representative groups of lamps in laboratory tests under controlled conditions at 10 or more operating hours per start. It is based on survival of at least 50% of the lamps and allows for individual lamps or groups of lamps to vary considerably from the average. For lamps with a rated average life of 24,000 hours, life is based on survival of 67% of the lamps. (351)
- Rated average life hours for universal lamps is based on vertical operating position. Operating these lamps in other position will reduce the life by approximately 25% of the rated average life hours.
- Approximate lumen values listed are for vertical operation of the lamp. (352)
- Means Lumens is the approximate lumen output at 40% of lamp rated average life. (353)
- Heat resisting glass bulb.


### Product data

Product Number	298265
Full product name	Switch Start MH Std 1000W Mog BT56 CL
Ordering Code	MH1000/U
Pack type	1 Sleeve Open End
Pieces per Sku	1
Skus/Case	6
Pack UPC	046677298265


Product data	
EAN2US	
Case Bar Code	50046677298260
Successor Product number	
Base	Mogul [Single Contact Mogul Screw]
Base Information	Brass [Brass Base]
Bulb	BT56
Bulb Material	Hard Glass
Bulb Finish	Clear
Operating Position	Universal [Any or Universal (U)]
Packing Type	1SL [1 Sleeve Open End]
Packing Configuration	6
RatedAvgLife(See Family Notes)	12000 hr
Ordering Code	MH1000/U
Pack UPC	046677298265
Case Bar Code	50046677298260
Energy Saving	Not Applicable
ANSI Code HID	M47/S
Watts	1000W
Lamp Voltage	263 V
Mercury (Hg) Content	150.1 mg
Color Code	635 [CCT of 3500K]
Color Rendering Index	65 Ra8
Color Designation	White
Color Temperature	3700 K
Initial Lumens	110000 Lm
Design Mean Lumens	71000 Lm
Light Center Length L	9.5 in
Max Overall Length (MOL) - C	15.375 in
Diameter D	7 in
Product Number	298265




SS MH Std BT56 CL

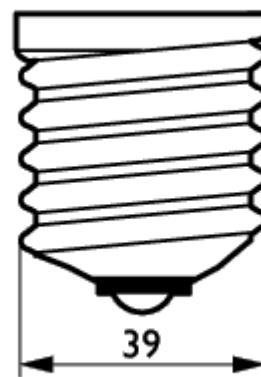

Cap- Base E39

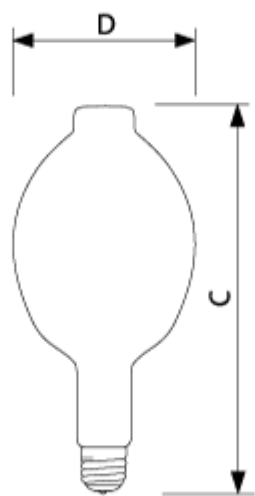

SS MH Std BT56

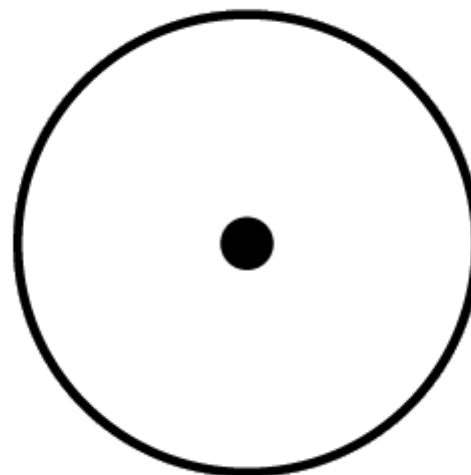

Operating Position any

