

PAR METAL HALIDE LAMPS


Designs with Narrow and Wide Beam Patterns.
Long Life, High Efficacy, UV-Block Coating
Open Fixtures

High Intensity Discharge Lamps

Watts	Bulb	Item#	Description	ANSI	Approx	Beam	Dimensions			Color		Case		
					Initial Lumens	Angle Spread	MOL	Dia	Avg. Life	Temp	CRI	QTy	Manufacture	
					(lm)		(in)	(in)	(Hours)	(K)			Production Code	
PAR Metal Halide Lamps - Par38														
*70	Par38	117	MP70/PAR38/U/FL/3K	M98/O	2700	20°	Spot	5.30	4.70	6000	3500	65	12	R00707781302
70	PAR38	1061	MP70/PAR38/U/FL/3K	M98/O	2610	60°	Flood	5.30	4.70	6000	3500	65	12	R00707782302
*70	PAR38	1118	MP70/PAR38/U/SP/4K	M98/O	2800	20°	Spot	5.30	4.70	6000	4500	65	12	R00707781402
70	PAR38	1062	MP70/PAR38/U/FL/4K	M98/O	3000	60°	Flood	5.30	4.70	6000	4500	65	12	R00707782402
*100	PAR38	1119	MP100/PAR38/U/SP/3K	M90/O	5800	20°	Spot	5.30	4.70	6000	3500	65	12	R01007781302
*100	PAR38	1063	MP100/PAR38/U/FL/3K	M90/O	4350	60°	Flood	5.30	4.70	6000	3500	65	12	R01007782302
100	PAR38	1064	MP100/PAR38/U/SP/4K	M90/O	6100	20°	Spot	5.30	4.70	6000	4000	65	12	R01007781402
100	PAR38	1065	MP100/PAR38/U/FL/4K	M90/O	4575	60°	Flood	5.30	4.70	6000	4200	65	12	R01007782402
*150	PAR38	120	MP150/PAR38/U/SP/3K	M102/O	1200	20°	Spot	5.30	4.70	6000	3500	65	12	R01507781302
*150	PAR38	1121	MP150/PAR38/U/FL/3K	M102/O	5400	60°	Flood	5.30	4.70	6000	3500	65	12	R01507782302
*150	PAR38	1122	MP150/PAR38/U/SP/4K	M102/O	8000	20°	Spot	5.30	4.70	6000	4500	65	12	R01507781402
*150	PAR38	1123	MP150/PAR38/U/FL/4K	M102/O	6000	60°	Flood	5.30	4.70	6000	4500	65	12	R01507782402

* Items only available for special orders

All measurements are shown in inches unless noted
Manage in Accordance with Disposal Laws
See: www.htr-group.com or 1-888-537-4874
See page 18/19/20 for safety handling and warning purposes

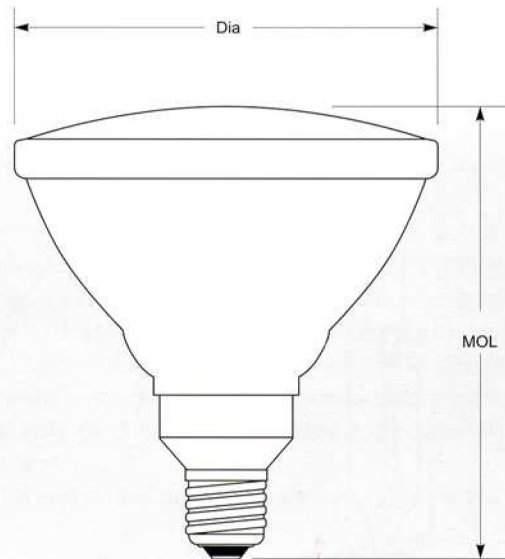

PAR-38
E26 Base