


PAR38 SERIES

- Crisp white light
- Directional light source • Long life
- Available in 120/130V

Watts	Bulb	Base	Item#	Description	Voltage (V)	Case Qty.	Dimension MOL (in)	Dimension Dia (in)	Approx Lumens (lm)	Beam Angle	Spread	Avg.Life (Hours)	Manufacture Production Code
PAR38 Series - Medium Screw Base													
45	PAR38	E26	3034	45PAR38/SP/120	120	15	5.32	4.76	560	12°	Spot	2500	H04577812202
			3036	45PAR38/SP/130	130	15	5.32	4.76	560	12°	Spot	2500	H04577812302
			@ 120 volts approximate 40 watts, 425 lumens, 5000 hours										
			3035	45PAR38/FL/120	120	15	5.32	4.76	560	30°	Flood	2500	H04577830202
			3037	45PAR38/FL/130	130	15	5.32	4.76	560	30°	Flood	2500	H04577830302
			@ 120 volts approximate 40 watts, 425 lumens, 5000 hours										
			*3088	45PAR38/WFL/120	120	15	5.32	4.76	560	50°	W. Flood	2500	H04577850202
*3076	45PAR38/WFL/130	130	15	5.32	4.76	560	50°	W. Flood	2500	H04577850302			
@ 120 volts approximate 40 watts, 425 lumens, 5000 hours													
60	PAR38	E26	3038	60PAR38/SP/120	120	15	5.32	4.76	850	12°	Spot	2500	H06077812202
			3040	60PAR38/SP/130	130	15	5.32	4.76	850	12°	Spot	2500	H06077812302
			@ 120 volts approximate 53 watts, 645 lumens, 5000 hours										
			3039	60PAR38/FL/120	120	15	5.32	4.76	850	30°	Flood	2500	H06077830202
			3041	60PAR38/FL/130	130	15	5.32	4.76	850	30°	Flood	2500	H06077830302
			@ 120 volts approximate 53 watts, 645 lumens, 5000 hours										
			*3089	60PAR38/WFL/120	120	15	5.32	4.76	850	50°	W. Flood	2500	H06077850202
*3077	60PAR38/WFL/130	130	15	5.32	4.76	850	50°	W. Flood	2500	H06077850302			
@ 120 volts approximate 53 watts, 645 lumens, 5000 hours													
75	PAR38	E26	3042	75PAR38/SP/120	120	15	5.32	4.76	1060	12°	Spot	2500	H07577812202
			3045	75PAR38/SP/130	130	15	5.32	4.76	1060	12°	Spot	2500	H07577812302
			@ 120 volts approximate 66 watts, 805 lumens, 5000 hours										
			3043	75PAR38/FL/120	120	15	5.32	4.76	1060	30°	Flood	2500	H07577830202
			3046	75PAR38/FL/130	130	15	5.32	4.76	1060	30°	Flood	2500	H07577830302
			@ 120 volts approximate 66 watts, 805 lumens, 5000 hours										
			*3044	75PAR38/WFL/120	120	15	5.32	4.76	1060	50°	W. Flood	2500	H07577850202
*3047	75PAR38/WFL/130	130	15	5.32	4.76	1060	50°	W. Flood	2500	H07577850302			
@ 120 volts approximate 66 watts, 805 lumens, 5000 hours													

* Items only available for special orders

All measurements are shown in inches unless noted

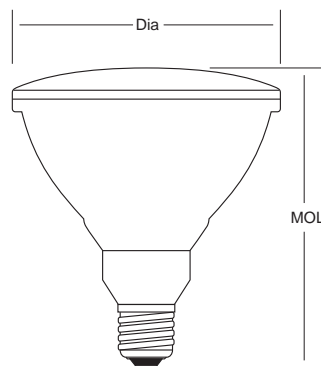

PAR38
E26 Base


PAR38 SERIES

- Crisp white light
- Directional light source
- Long life
- Available in 120/130V

Watts	Bulb	Base	Item#	Description	Voltage (V)	Case Qty.	Dimension MOL (in)	Dimension Dia (in)	Approx Lumens (lm)	Beam Angle	Spread	Avg. Life (Hours)	Manufacture Production Code
PAR38 Series - Medium Screw Base													
90	PAR38	E26	*3078	90PAR38/NSP/120	120	15	5.32	4.76	1270	9°	N. Spot	2500	H09077809202
	PAR38		*3079	90PAR38/NSP/130	130	15	5.32	4.76	1270	9°	N. Spot	2500	H09077809302
				@ 120 volts approximate 79 watts, 1000 lumens, 5000 hours									
	PAR38		3048	90PAR38/SP/120	120	15	5.32	4.76	1270	12°	Spot	2500	H09077812202
	PAR38		3051	90PAR38/SP/130	130	15	5.32	4.76	1270	12°	Spot	5000	H09077812302
				@ 120 volts approximate 79 watts, 1000 lumens, 5000 hours									
	PAR38		3049	90PAR38/FL/120	120	15	5.32	4.76	1270	30°	Flood	2500	H09077830202
	PAR38		3052	90PAR38/FL/130	130	15	5.32	4.76	1270	30°	Flood	2500	H09077830302
				@ 120 volts approximate 79 watts, 1000 lumens, 5000 hours									
	PAR38		3050	90PAR38/WFL/120	120	15	5.32	4.76	1270	50°	W. Flood	2500	H09077850202
	PAR38		3053	90PAR38/WFL/130	130	15	5.32	4.76	1270	50°	W. Flood	2500	H09077850302
				@ 120 volts approximate 79 watts, 1000 lumens, 5000 hours									
100	PAR38	E26	3054	100PAR38/SP/120	120	15	5.32	4.76	1500	12°	Spot	2500	H10077812202
	PAR38		3057	100PAR38/SP/130	130	15	5.32	4.76	1500	12°	Spot	2500	H10077812302
				@ 120 volts approximate 88 watts, 1200 lumens, 5000 hours									
	PAR38		3055	100PAR38/FL/120	120	15	5.32	4.76	1500	30°	Flood	2500	H10077830202
	PAR38		3058	100PAR38/FL/130	130	15	5.32	4.76	1500	30°	Flood	2500	H10077830302
				@ 120 volts approximate 88 watts, 1200 lumens, 5000 hours									
	PAR38		3056	100PAR38/WFL/120	120	15	5.32	4.76	1500	50°	W. Flood	2500	H10077850202
	PAR38		3059	100PAR38/WFL/130	130	15	5.32	4.76	1500	50°	W. Flood	2500	H10077850302
				@ 120 volts approximate 88 watts, 1200 lumens, 5000 hours									
150	PAR38	E26	*3060	150PAR38/SP/120	120	15	5.32	4.76	2200	30°	Flood	2000	H15077830202

* Items only available for special orders

All measurements are shown in inches unless noted

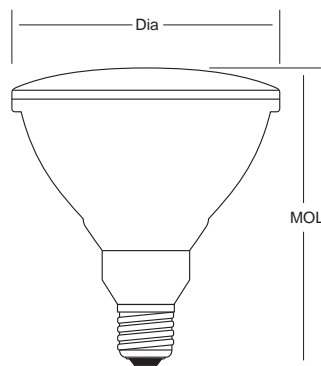

PAR38
E26 Base